

PHILIPS

Compatibility List Professional Q3-Q4 2025

LEDtube

Table of contents

MASTER LEDtube HF T5

MASTER LEDtube HF T5 HO - 600 mm	2
MASTER LEDtube HF T5 HO - 900 mm	4
MASTER LEDtube HF T5 HO - 1200 mm	6
MASTER LEDtube HF T5 HO - 1500 mm	8
MASTER LEDtube HF T5 UO - 1500 mm	10
MASTER LEDtube HF T5 HE - 600 mm	11
MASTER LEDtube HF T5 HE - 900 mm	14
MASTER LEDtube HF T5 HE - 1200 mm	16
MASTER LEDtube HF T5 HE - 1500 mm	18

CorePro LEDtube HF T5

CorePro LEDtube HF T5 HO - 1200 mm	20
CorePro LEDtube HF T5 HO - 1500 mm	22
CorePro LEDtube HF T5 HE - 600 mm	24
CorePro LEDtube HF T5 HE - 1200 mm	27
CorePro LEDtube HF T5 HE - 1500 mm	29

MASTER LEDtube HF T8

MASTER LEDtube HF T8 - 600 mm	31
MASTER LEDtube HF T8 - 1200 mm	33
MASTER LEDtube HF T8 - 1500 mm	35

MASTER Value LEDtube Universal T8

MASTER Value LEDtube Universal T8 - 1200 mm	37
MASTER Value LEDtube Universal T8 - 1500 mm	39

CorePro LEDtube Universal T8

CorePro LEDtube Universal T8 - 600 mm	41
CorePro LEDtube Universal T8 - 1200 mm	43
CorePro LEDtube Universal T8 - 1500 mm	45



Q3-Q4 2025

MASTER LEDtube HF T5 HO - 600 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div><div>Works with High Frequency ballast (HF)</div></div><div><div>InstantFit™ HASSLE FREE INSTALLATION</div></div></div>			MAS LEDtube HF 600mm HO 10.5W 8xx T5
			Model number / (Short) EOC code: 9290035962 / 8720169 16307200 9290035963 / 8720169 16309600 9290035964 / 8720169 16311900
			AC (50 Hz) on HF Ballast Compatible
PHILIPS	Ballast type	12nc	Lamps on ballast
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006708	1
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006983	1
	HF-P 1 24-39 TL5 HO III IDC	9137130340	1
	HF-P 1 24-39 TL5 HO 220-240	9137001659	1
	HF-S 124-39 TL5 II	9137130344	1
	HF-P 1 24-39 TL5 HO EII 220-240	9137006131	1
	HF-R 224 TL5/PL-L EII	9137006331	2
	HF-R 224 TL5 220-240	9137001411	2
	HF-Pi 2 14/21/24/39 TL5 EII 220-240	9137006242	2
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006709	2
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006984	2
	HF-P 224-39 TL5 HO III IDC	9137130341	2
	HF-S 224-39 TL5 II	9137130345	2
	HF-Ri TD 3 14/24 TL5 E+	9137006790	3
	HF-Ri TD 4 14/24 TL5 E+	9137006791	4
	HF-Pi 3/4 14/24 TL5/PLL EII	9137006576	3
	HF-Pi 3/4 14/24 TL5/PLL EII	9137006576	4
	HF-Pi I 14/21/24/39 TL5 EII 220-240	9137006240	1
OSRAM	QT-FIT 5/8 2x18-39		2
	QTi 1x14/24/21/39 GII		1
	Qti DALI 2x14/24 Dim		2
	QTi 2x14/24/21/39 GII		2
	QTi DALI 3x14/24 Dim		3
	QTi 3x14/24 Dim		3
	QTi 4x14/24 Dim		4
	QTi DALI 4x14/24 Dim		4
	QTP5 1X24-39		1
	QT-FQ 1X24-39/230-240F/CW		1
HELVAR	EL1x24s		1
TRIDONIC ATCO	PC 2x24 T5 TOP Ip	22185160	2
	PC 3/4x24 T5 TOP Ip	22185221	3
	PC 3/4x24 T5 TOP Ip	22185221	4
	PC 2/14-21/24/39 T5 PRO-M Ip	22176185	2
	PCA 2x14/24 T5 ECO Ip	22185095	2
	PCA 2x14/24 T5 EXCEL one4all Ip	22185104	2
	PCA 3x14/24 T5 EXCEL one4all Ip	22176209	3
	PCA 3x14/24 T5 ECO Ip	22176211	3
	PCA 3x14/24 T5 EXCITE Ip	28000307	3
	PCA 4x14/24 T5 EXCEL one4all Ip	22176210	4
	PCA 4x14/24 T5 ECO Ip	22176212	4
	PCA 4x14/24 T5 EXCITE Ip	28000308	4
VOSSLOH-SCHWABE	ELXc 140.862	188140	1
	ELXc 240.863	188616	2
	ELXc 139.632	188945	1
	ELXd 124.600	188329	1
	ELXd 124.607	188336	1
	ELXc 239.635	188948	2
	ELXd 224.601	188330	2
	ELXd 224.608	188337	2
	ELXd 324.623	188597	3
	ELXd 324.626	188600	3
	ELXd 424.624	188598	4
	ELXd 424.628	188602	4

(1) Do not use in closed luminaires
(2) Do not use in combination with a motion sensor
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185



Q3-Q4 2025

MASTER LEDtube HF T5 HO - 600 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div><div></div></div></div>			MAS LEDtube HF 600mm HO 10.5W 8xx T5
			Model number / (Short) EOC code: 9290035962 / 8720169 16307200 9290035963 / 8720169 16309600 9290035964 / 8720169 16311900
			AC (50 Hz) on HF Ballast Compatible
BAG-HUECO	Ballast type	12nc	Lamps on ballast
	BCS39.1FX-11/220-240	10077581	1
	BCD39.1F-01/220-240/1-10V	10097246	1
	BCS39.2FX-11/220-240	10077582	2
	BCD39.2F-01/220-240/1-10V	10097296	2
	MLS54.2F-01/220-240	166412	2
	MLD39.1FR-11/220-240/DALI	10097811	1
	MLS39.1-2FR-11/220-240	10092026	1
	MLS39.1-2FR-11/220-240	10092026	2
	MLD39.2FR-11/220-240/DALI	10092117	2
	MLD14/24.3FR-04/220-240/DALI	10105150	3
	MLS14/24.3-4FR-11/220-240	10095345	3
	MLS14/24.3-4FR-11/220-240	10095345	4
	MLS80.1F-01/220-240	166312	1
Others	Direct mains		

- (1) Do not use in closed luminaires
- (2) Do not use in combination with a motion sensor
- (3) Do not Dim below 10% / Dali step 170
- (4) Do not Dim below 20% / Dali step 185

MASTER LEDtube HF InstantFit T5 HO

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed.

Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp.



Q3-Q4 2025

MASTER LEDtube HF T5 HO - 900 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div><div>Works with High Frequency ballast (HF)</div></div><div><div>InstantFit™ HASSLE FREE INSTALLATION</div></div></div>			MAS LEDtube HF 900mm HO 18.5W 8xx T5	
			Model number / (Short) EOC code: 9290035965 / 8720169 16313300 9290035966 / 8720169 16315700 9290035967 / 8720169 16317100	
			AC (50 Hz) on HF Ballast Compatible	
PHILIPS	Ballast type	12nc	Lamps on ballast	Dim
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006708	1	* / Dim (3)
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006983	1	
	HF-P 1 24-39 TL5 HO III IDC	9137130340	1	
	HF-P 1 24-39 TL5 HO 220-240	9137001659	1	
	HF-S 124-39 TL5 II	9137130344	1	
	HF-R 139 TL5 EII	9137006329	1	Dim (2) (4)
	HF-P 1 24-39 TL5 HO EII 220-240	9137006131	1	
	HF-Pi 2 14/21/24/39 TL5 EII 220-240	9137006242	2	
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006709	2	Dim (3)
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006984	2	Dim (3)
	HF-P 224-39 TL5 HO III IDC	9137130341	2	
	HF-S 224-39 TL5 II	9137130345	2	*
	HF-R 239 TL5 DALI 220-240	9137001414	2	* / Dim (4)
	HF-R 239 TL5 EII	9137006332	2	Dim (3)
	HF-Pi I 14/21/24/39 TL5 EII 220-240	9137006240	1	
OSRAM	QT-FIT 5/8 2x18-39		2	
	QTi 1x21/39 Dim		1	** / Dim (3)
	QTi DALI 1x21/39 Dim		1	** / Dim
	QTi 2x21/39 Dim		2	** / Dim (3)
	QTi DALI 2x21/39 Dim		2	** / Dim (3)
	QTi 1x14/24/21/39 GII		1	*
	QTi 2x14/24/21/39 GII		2	*
	QT-FQ 1X24-39/230-240F/CW		1	
	QTP5 1X24-39		1	
	QT-FQ 1X39/230-240		1	
	QT-FQ 1X39/230-240 CW		1	
HELVAR	EL 1X39/36ngn5		1	**
	EL 1X39sc		1	
	EL 2X39/36ngn5		2	**
	EL 2X39sc		2	**
TRIDONIC ATCO	PC 1x39 T5 TOP Ip	22185161	1	
	PC 1x39 T5 PRO Ip	22185151	1	
	PC 1/39 T5 PRO Ip	22087908	1	**
	PCA 1x39 T5 BASIC Ip	22185092	1	*
	PC 2x39 T5 TOP Ip	22185162	2	*
	PC 2x39 T5 PRO Ip	22185152	2	*
	PCA 2x39 T5 BASIC Ip	22185093	2	**
	PCA 1x21/39 T5 ECO IP	22185101	1	*
	PCA 1x21/39 T5 EXCEL one4all Ip	22185110	1	* / (2)
	PC 2/14-21/24/39 T5 PRO-M Ip	22176185	2	*
	PCA 2x21/39 T5 ECO IP	22185102	2	
	PCA 2x21/39 T5 EXCEL one4all Ip	22185111	2	
VOSSLOH-SCHWABE	ELXc 140.862	188140	1	
	ELXc 240.863	188616	2	
	ELXc 139.632	188945	1	*
	ELXd 139.609	188338	1	** / Dim (3)
	ELXd 139.602	188331	1	**
	ELXc 239.635	188948	2	*
	ELXd 239.610	188339	2	** / Dim (4)
	ELXd 239.621	188350	2	**

(1) Do not use in closed luminaires
(2) Do not use in combination with a motion sensor
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185



Q3-Q4 2025

MASTER LEDtube HF T5 HO - 900 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div></div><div></div></div>			MAS LEDtube HF 900mm HO 18.5W 8xx T5
			Model number / (Short) EOC code: 9290035965 / 8720169 16313300 9290035966 / 8720169 16315700 9290035967 / 8720169 16317100
			AC (50 Hz) on HF Ballast Compatible
BAG-HUECO	Ballast type	12nc	Lamps on ballast
	BCS39.1FX-11/220-240	10077581	1
	BCD39.1F-01/220-240/1-10V	10097246	1
	BCS39.2FX-11/220-240	10077582	2
	BCD39.2F-01/220-240/1-10V	10097296	2
	MLS54.2F-01/220-240	166412	2
	MLS39.1-2FR-11/220-240	10092026	1
	MLS39.1-2FR-11/220-240	10092026	2
	MLD39.2FR-11/220-240/DALI	10092117	2
	MLS80.1F-01/220-240	166312	1
Others	Direct mains		

- (1) Do not use in closed luminaires
(2) Do not use in combination with a motion sensor
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185

MASTER LEDtube HF InstantFit T5 HO

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.
Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed.
Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp.



Q3-Q4 2025

MASTER LEDtube HF T5 HO - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div></div></div>				MAS LEDtube HF 1200mm HO 26W 8xx T5
				Model number / (Short) EOC code: 9290023520A / 8718699 74951400 9290023521A / 8718699 74953800 9290023522A / 8718699 74955200
				AC (50 Hz) on HF Ballast Compatible
PHILIPS	Ballast type	12nc	Lamps on ballast	
	HF-P 154/155 TL5 HO/PL-L III IDC 4CIC	9137130282	1	
	HF-P 154/155 TL5 HO/PL-L III IDC C2E	9137130282	1	
	HF-R 154 TL5 220-240	9137001291	1	**
	HF-R 154 TL5 220-240	9137006088	1	
	HF-E 1/2 54 TL5 II	9137130408	1	**
	HF-R TD 154 TL5 EII 220-240	9137006064	1	Dim (3)
	HF-P 154 TL5 HO EII 220-240	9137006133	1	
	HF-S 154 TL5 II 4CIC	9137130336	1	
	HF-S 154 TL5 II C2E	9137130336	1	
	HF-R Es 154 TL5	9137006618	1	Dim
	HF-R DALI 154 TL5 220-240	9137001335	1	**
	HF-Pi 1 28/35/49/54 TL5 EII 220-240	9137006241	1	
	HF-Ri TD 1 28/35/49/54 TL5 E+	9137006956	1	*/Dim
	HF-Ri TD 1 28-35-49-54 TL5 E+	9137006560	1	*/Dim
	HF-S 254 TL5 II 4CIC	9137130337	2	*
	HF-S 254 TL5 II C2E	9137130337	2	
	HF-E 1/2 54 TL5 II	9137130408	2	
	HF-R Es 254 TL5	9137006619	2	
	HF-P Xt 254 TL5 EII 220-240	9137006300	2	**
	HF-P 254/255 TL5 HO/PL-L III IDC 4CIC	9137130283	2	
	HF-P 254/255 TL5 HO/PL-L III IDC C2E	9137130283	2	
	HF-R 254 TL5 EII	9137006089	2	
	HF-R TD 254 TL5 EII	9137006065	2	
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2	**
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006958	2	* / Dim (1)
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006561	2	/ (1)
OSRAM	QTP-OPTIMAL 1x54-58		1	
	QT-FIT 5/8 1x54-58		1	
	QTP5 1x54		1	
	QT-FQ 1x54/230-240		1	**
	QTP-OPTIMAL 2x54-58		2	
	QT-FIT 5/8 2x54-58		2	
	QTP5 2x54		2	
	QT-FQ 2x54/230-240 Dim		2	
	Qti 1x28/54/35/49 GII		1	*
	Qti 1x28/54 Dim		1	Dim
	Qti DALI 1x28/54 Dim		1	Dim
	Qti 2x28/54/35/49 GII		2	**
	Qti 2x28/54 Dim		2	
	Qti DALI 2x28/54 Dim		2	
HELVAR	EL1x54ngn5		1	*
	EL1x54s		1	
	EL1x54iDim		1	**
	EL1x54sc		1	**
	EL2x54ngn5		2	
	EL2x54iDim		2	
	EL2x54sc		2	
TRIDONIC ATCO	PC 1x54 T5 PRO Ip	22185155	1	
	PC 1x54 T5 TOP Ip	22185165	1	** / (1)
	PC 1/54 T5 INDUSTRY	89800458	1	** / (1)
	PC 2x54 T5 PRO Ip	22185156	2	*
	PC 2x54 T5 TOP Ip	22185166	2	
	PC 2/54 T5 INDUSTRY	89800459	1	** / (1)
	PC 1X28/54 T5 EXCEL one4all Ip	22176174	1	**
	PC 1X54 T5 TOP IP	28000031	1	**
	PCA 2x54 T5 BASIC Ip	22185089	2	**
	PCA 1x28/54 T5 ECO Ip	22185099	1	
	PCA 1x28/54 T5 EXCEL one4all Ip	22185108	1	
	PCA 2x28/54 T5 ECO Ip	22185100	2	
	PCA 2x28/54 T5 EXCEL one4all Ip	22185109	2	
	PC 2/14-35/49/54 T5 PRO-M Ip	22176186	2	

(1) Do not use in closed luminaires
(2) Do not use in combination with a motion sensor
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185



Q3-Q4 2025

MASTER LEDtube HF T5 HO - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div></div></div>				MAS LEDtube HF 1200mm HO 26W 8xx T5
				Model number / (Short) EOC code: 9290023520A / 8718699 74951400 9290023521A / 8718699 74953800 9290023522A / 8718699 74955200
				AC (50 Hz) on HF Ballast Compatible
VOSSLOH-SCHWABE	Ballast type	12nc	Lamps on ballast	
	ELXc 254.865	188618	2	
	ELXc 154.633	188946	1	*
	ELXd 154.611	188340	1	Dim
	ELXd 154.603	188332	1	Dim
	ELXc 254.636	188949	2	
	ELXd 254.612	188341	2	
	ELXd 254.604	188333	2	
BAG-HUECO	BCS54.1FX-11/220-240	10077585	1	
	BCD54.1F-01/220-240/1-10V	10097248	1	
	BCS54.1FR-01/220-240	10075881	1	
	BCS54.2FX-11/220-240	10077586	2	
	BCD54.2F-01/220-240/1-10V	10097298	2	
	MLS80.1/54.2FR-11/220-240	10071609	1	
	MLS80.1FR-11/220-240	10071608	1	
	MLD80.1FR-11/220-240/DALI	10097820	1	*
	MLD54.2FR-11/220-240/DALI	10092121	2	
	MLS54.2F-01/220-240	166412	2	
	MLS80.1/54.2FR-11/220-240	10071609	2	*
	MLS80.1F-01/220-240	166312	1	
TCI	BTLT 154	137998/154	1	*
	BTLT 254	137999/54	2	
Arten EFA	HFL 254-58M		2	
Others	Direct mains			

- (1) Do not use in closed luminaires
- (2) Do not use in combination with a motion sensor
- (3) Do not Dim below 10% / Dali step 170
- (4) Do not Dim below 20% / Dali step 185

MASTER LEDtube HF InstantFit T5 HO

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed.

Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.


Dimming a LEDtube: Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp.

MASTER LEDtube HF T5 HO - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	



	Ballast type	12nc	Lamps on ballast	MAS LEDtube HF 1500mm HO 26W 8xx T5
PHILIPS	HF-P 1 49 TL5 HO 220-240	9137001660	1	Model number / (Short) EOC code: 9290023523A / 8718699 74957600 9290023524A / 8718699 74959000 9290023525A / 8718699 74961300
	HF-P 149 TL5 HO EII 220-240	9137006132	1	AC (50 Hz) on HF Ballast Compatible
	HF-P 149 TL5 HO III IDC C2E	9137130280	1	*
	HF-P 149 TL5 HO III IDC 4CIC	9137130280	1	*
	HF-S 149 TL5 II 4CIC	9137130334	1	
	HF-S 149 TL5 II C2E	9137130334	1	
	HF-E 1/2 49 TL5 II	9137130407	1	
	HF-P 149 TL5 220-240	9137001177	1	**
	HF-R 149 TL5 220-240	9137001181	1	*
	HF-R TD 149 TL5 EII 220-240	9137006062	1	* / Dim (3)
	HF-Pi 1 28/35/49/54 TL5 EII 220-240	9137006241	1	*
	HF-Ri TD 1 28/35/49/54 TL5 E+	9137006956	1	* / Dim
	HF-Ri TD 1 35/49/80 TL5 E+	9137006957	1	* / Dim
	HF-R Es 149 TL5	9137006620	1	
	HF-P Xt 149 TL5 EII 220-240	9137006297	1	
	HF-Pi 1 28/35/49/80 TL5 EII	9137006525	1	*
	HF-R 149 TL5 EII	9137006086	1	*
	HF-Pi 1 28/35/49/80 TL5 EII 220-240	9137006525	1	*
	HF-R 149 TL5 EII 220-240	9137006086	1	Dim (3)
	HF-Ri TD 1 28-35-49-54 TL5 E+	9137006560	1	* / Dim
	HF-P 249 TL5 220-240	9137001240	2	** / (1)
	HF-P 249 TL5 HO III IDC 4CIC	9137130281	2	
	HF-P 249 TL5 HO III IDC C2E	9137130281	2	
	HF-E 1/2 49 TL5 II	9137130407	2	
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2	**
	HF-Pi 2 28/35/49/80 TL5 EII	9137006526	2	*
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006958	2	*
	HF-S 249 TL5 II 4CIC	9137130335	2	
	HF-S 249 TL5 II C2E	9137130335	2	
	HF-R Es 249 TL5	9137006621	2	* / (1)
	HF-P Xt 249 TL5 EII 220-240	9137006298	2	
	HF-P 249 TL5 220-240	9137001324	2	*
	HF-R 249 TL5 EII	9137006087	2	
	HF-Pi 2 28/35/49/80 TL5 EII 220-240	9137006526	2	*
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006561	2	*
OSRAM	QT-FQ 1X49/230-240 CW	A45625D00DG	1	
	QTP5 1x49 (shorter version)	A63946E01DG	1	*
	QT-FIT5 1X49	AA7471701DG	1	*
	QTP5 2X49	AA4002200DG	2	
	QT-FIT5 2X49	AA4068801DG	2	*
	QTP5 1x49 (longer version)		1	*
	Qti 1x35/49/80 GII	AA3529702OL	1	*
	Qti 1x35/49/80		1	
	Qti 1x28/54/35/49 GII	AA3529600DG	1	
	Qti 1x35/49/80 Dim		1	* / Dim (2)
	Qti DALI 1x35/49/80 Dim		1	*
	Qti 2x35/49/80 GII	A74908402DG	2	*
	Qti 2x28/54/35/49 GII	AA3529900DG	2	*
	Qti 2x35/49 Dim		2	*
	Qti DALI 2x35/49 Dim		2	* / Dim (3)
	Qti 2x35/49/80 Dim		2	*
	Qti DALI 2x35/49/80 Dim	AA3864303OL	2	* / Dim (3)
HELVAR	EL1x49s-u		1	*
	EL1x49s		1	*
	EL1X49ngn5		1	*
	EL1x49sc		1	
	EL2x49s		2	
	EL2X49ngn5		2	

(1) Do not use in closed luminaires
(2) Do not use in combination with a motion sensor
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185



Q3-Q4 2025

MASTER LEDtube HF T5 HO - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div><div>Works with High Frequency ballast (HF)</div></div><div><div>InstantFit™ HASSLE FREE INSTALLATION</div></div></div>			MAS LEDtube HF 1500mm HO 26W 8xx T5
			Model number / (Short) EOC code: 9290023523A / 8718699 74957600 9290023524A / 8718699 74959000 9290023525A / 8718699 74961300
			AC (50 Hz) on HF Ballast Compatible
TRIDONIC ATCO	Ballast type	12nc	Lamps on ballast
	PC 1/49 T5 PRO Ip	22087917	1
	PC 1x49 T5 PRO Ip	22185153	1
	PC 1/49 T5 INDUSTRY	89800456	1
	PC 1x49 T5 TOP Ip	22185163	1
	PCA 1x49 T5 BASIC Ip	22185082	1
	PC 2/49 T5 PRO Ip	22087646	2
	PCA 2/49 T5 ECO Ip	22089499	2
	PC 2x49 T5 PRO Ip	22185154	2
	PC 2/49 T5 INDUSTRY	89800457	2
	PC 2x49 T5 TOP Ip	22185164	2
	PCA 2x49 T5 BASIC Ip	22185083	2
	PCA 1x35/49/80 T5 ECO Ip	22185096	1
	PCA 1x35/49/80 T5 EXCEL one4all Ip	22185105	1
	PCA 1x35/49/80 T5 EXCEL one4all Ip	22176172	1
	PCA 2x35/49 T5 EXCEL one4all Ip	22185106	2
	PCA 2x35/49 T5 ECO Ip	22185097	2
	PC 2/14-35/49/54 T5 PRO-M Ip	22176186	2
	PC 1/14-35/49/80 T5 PRO-M Ip	22176184	1
VOSSLOH-SCHWABE	ELXc 149.234	183116	1
	ELXc 249.235	183117	2
	ELXc 154.633	188946	1
	ELXc 180.634	188947	1
	ELXd 180.613	188342	1
	ELXd 180.605	188334	1
	ELXc 254.636	188949	2
	ELXd 249.614	188343	2
	ELXc 280.637	188950	2
	ELXd 249.606	188335	2
	ELXd 280.630	188604	2
BAG-HUECO	BCS49.1FX-11/220-240	10077583	1
	BCD49.1F-01/220-240	10097247	1
	SCS49.1F-01/220-240	166512	1
	BCS49.2FX-11/220-240	10077584	2
	BCD49.2F-01/220-240	10097297	2
	MLS80.1/54.2FR-11/220-240	10071609	1
	MLS80.1FR-11/220-240	10071608	1
	MLD80.1FR-11/220-240/DALI	10097820	1
	MLD54.2FR-11/220-240/DALI	10092121	2
	MLD80.2FR-11/220-240/DALI	10101905	2
	MLS54.2F-01/220-240	166412	2
	MLS80.1/54.2FR-11/220-240	10071609	2
	MLS80.1F-01/220-240	166312	1
TCI	BTLT 149	137998/149	1
	BTLT 249	137999/49	2
Others	Direct mains		

- (1) Do not use in closed luminaires
(2) Do not use in combination with a motion sensor
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185

MASTER LEDtube HF InstantFit T5 HO

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.
Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed.
Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp.

Q3-Q4 2025

MASTER LEDtube HF T5 UO - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div></div><div></div></div>			MAS LEDtube HF 1500mm UO 36W 8xx T5
			Model number / (Short) EOC code: 9290031539 / 87195144 1905600 9290031540 / 87195144 1907000 9290031541 / 87195144 1909400
			AC (50 Hz) on HF Ballast Compatible
PHILIPS	Ballast type	10nc / Ref. no	Lamps on ballast
	HF-P 2 80 TL5/PL-L III IDC	9137130343	2
	HF-P I 80 TL5/PL-L III IDC	9137130342	1
	HF-P Xt 180 TL5 EII 220-240	9137006301	1
	HF-P Xt 280 TL5 EII 220-240	9137006302	2
	HF-R 180 TL5/PLL EII	9137006090	1
	HF-R 280 TL5/PLL EII 220-240	9137006091	2
	HF-R TD 180 TL5/PLL 220-240	9137006066	1
	HF-R TD 280 TL5/PL-L EII	9137006096	2
	HF-S 2 80 TL5/PL-L II	9137130423	2
OSRAM	QT-FQ 1x80/230-240		1
	QT-FQ 2x80		2
	QTP5 1x80		1
	Qti 1x35/49/80 GII		1
HELVAR	EL1x80iDim		1
	EL1x80sc		1
	EL2x80iDim		2
TRIDONIC ATCO	PC 1/80 T5 INDUSTRY	89800460	1
	PC 1x80 T5 PRO Ip	22185209	1
	PC 2/80 T5 INDUSTRY	89800461	2
	PC 2x80 T5 PRO Ip	22185210	2
	PCA 1x80 T5 BASIC Ip	22185084	1
	PCA 2x80 T5 BASIC Ip	22185085	2
	PCA 2x80 T5 ECO Ip	22185098	2
	PCA 2x80 T5 EXCEL one4all Ip	22185107	2
	PC 1/80 T5 PRO Ip	22087618	1
	LUXMATE PCA 1/80 T5 ECO		1
VOSSLOH-SCHWABE	ELXc 180.866	188144	1
	ELXc 280.538	188619	2
	ELXc 180.634	188947	1
	ELXc 280.637	188950	2
BAG-HUECO	BCS80.1FX-11/220-240	10077587	1
	BCS80.2FX-11/220-240	10095407	1
	SCS80.2F-01/220-240	166692	2
	MLS80.1/54.2FR-11/220-240	10071609	2
	MLS80.1FR-11/220-240	10071608	1
	MLD80.1FR-11/220-240/DALI	10097820	1
	MLD80.2FR-11/220-240/DALI	10101905	1
Others	Direct mains		

MASTER LEDtube HF InstantFit T5 UO

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.


Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp.

MASTER LEDtube HF T5 HE - 600 mm

Ballast compatibility

	Ballast is compatible.	This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

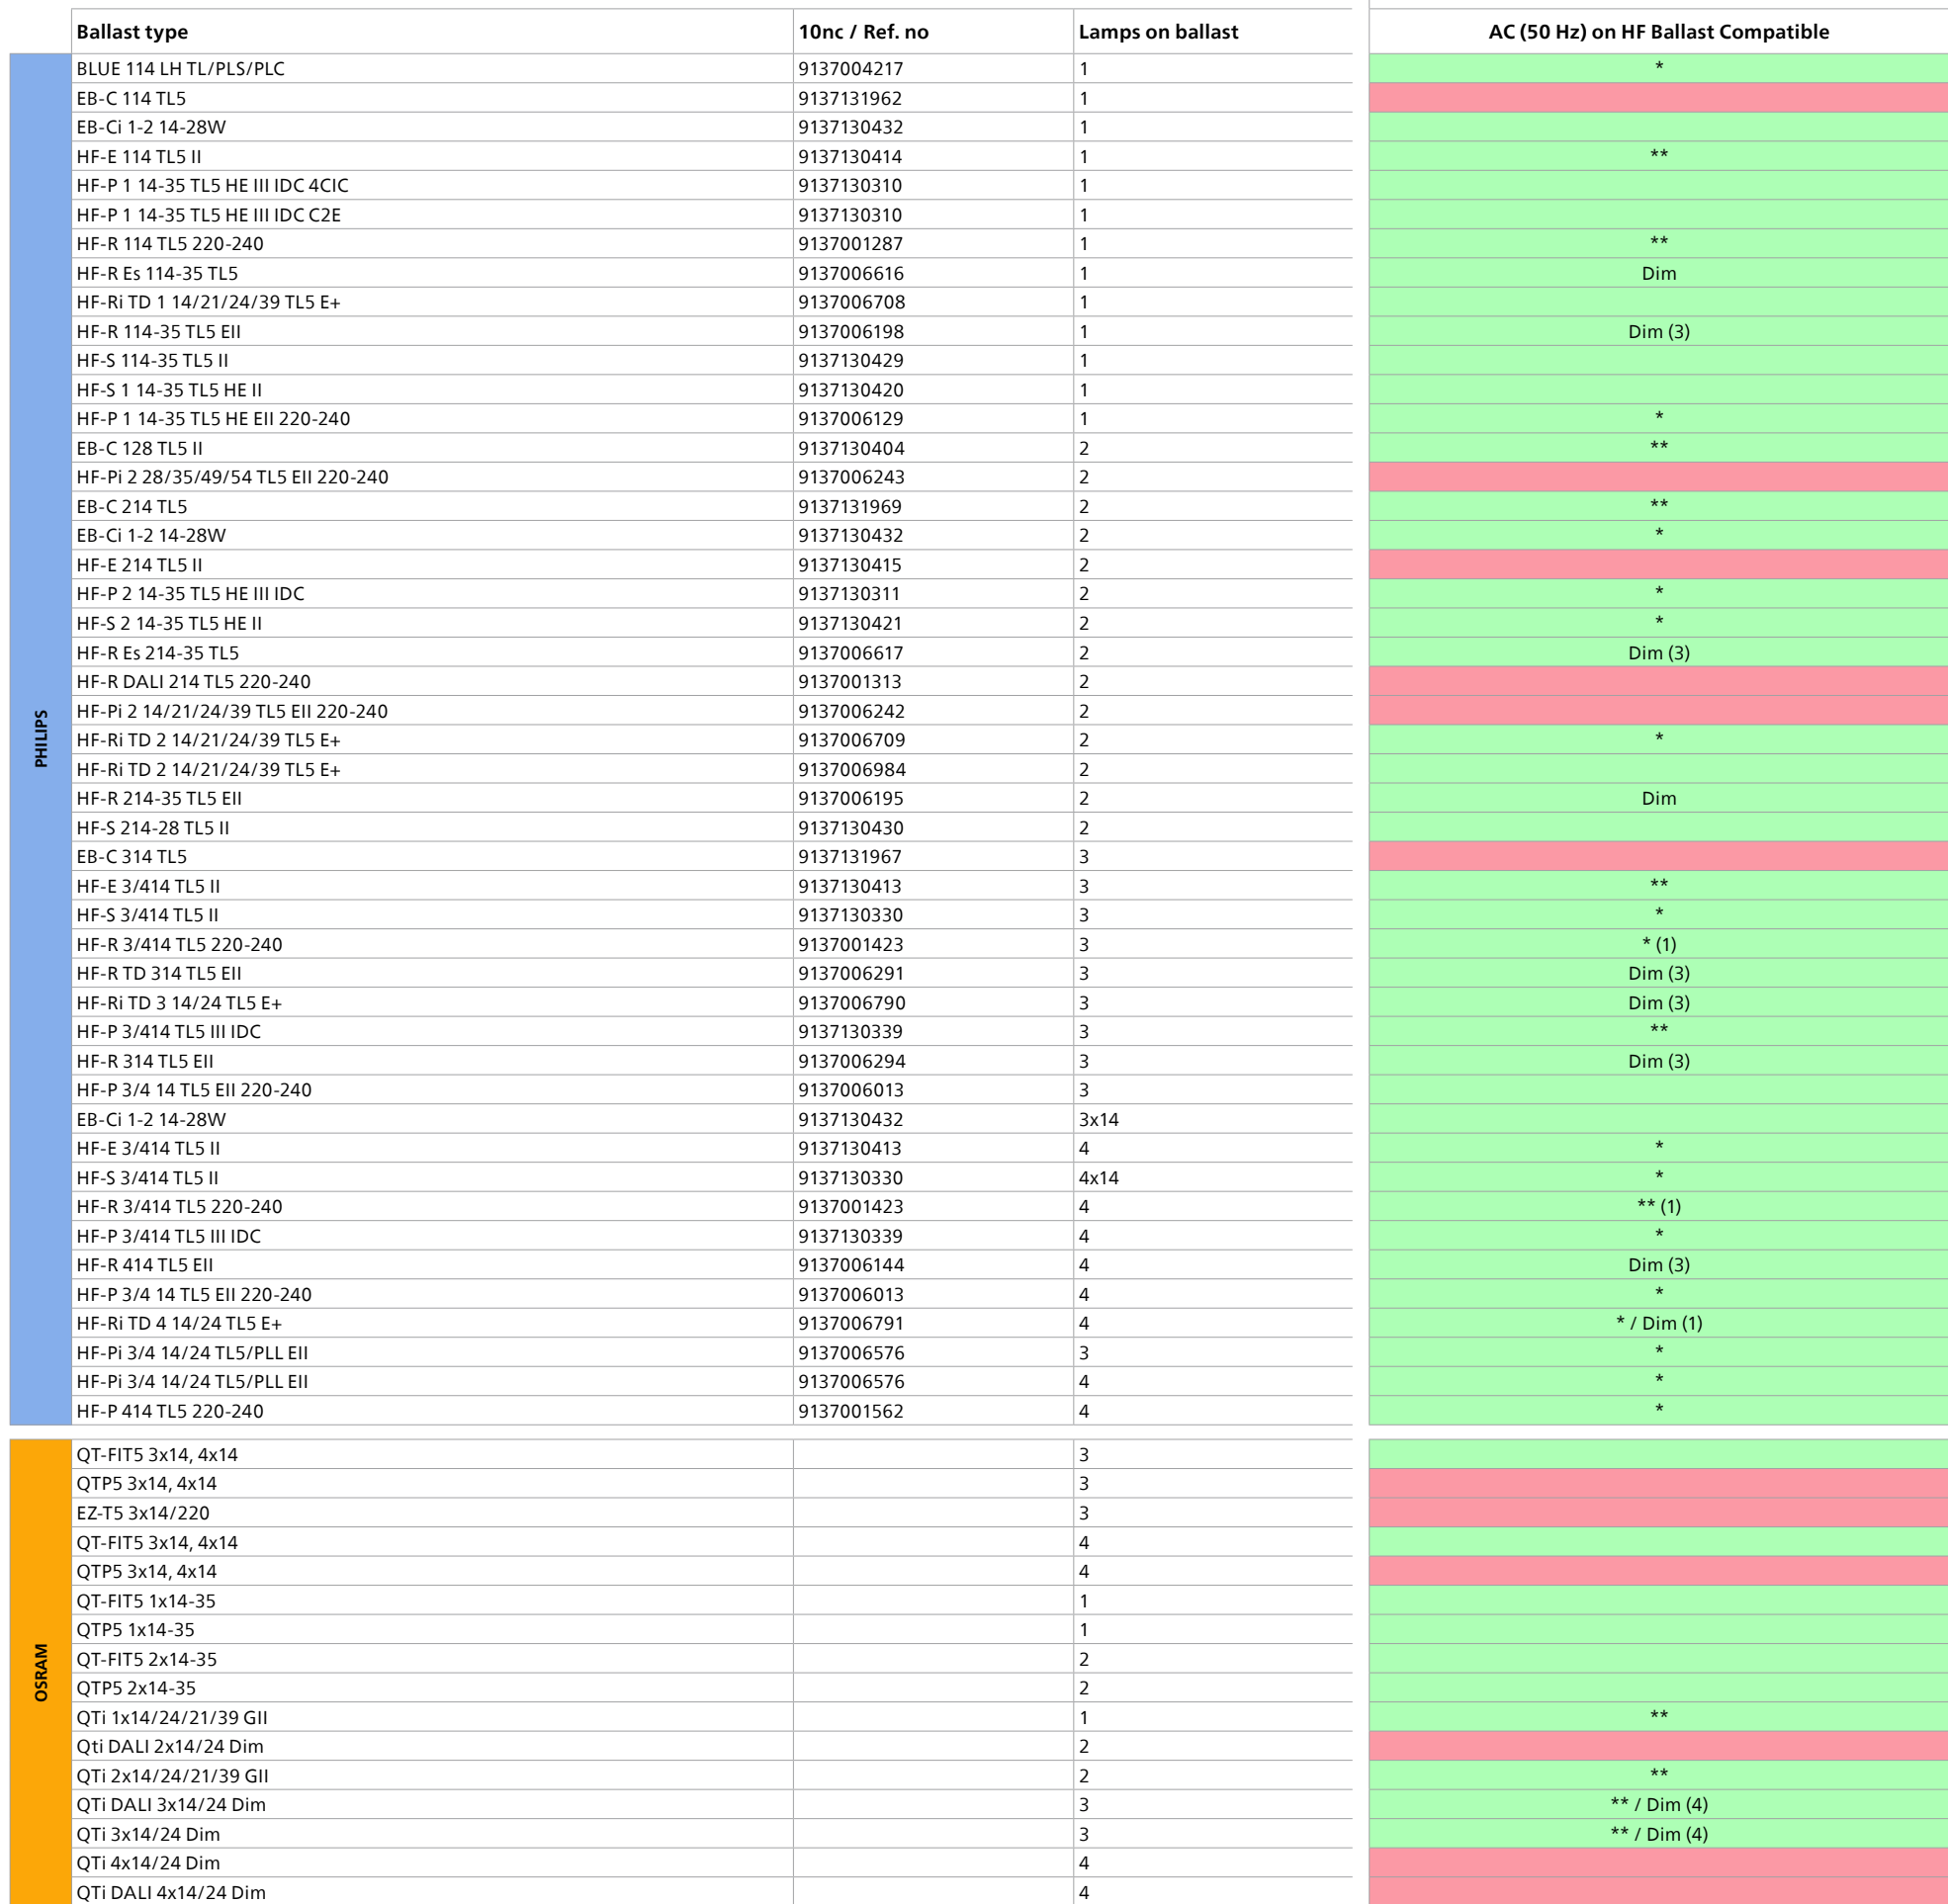

- 11

Q3-Q4 2025

MASTER LEDtube HF T5 HE - 600 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div></div><div></div></div>				MAS LEDtube HF 600mm HE 7W 8xx T5
				Model number / (Short) EOC code: 9290037951 / 87201693 0966100 9290037952 / 87201693 0968500 9290037953 / 87201693 0970800
				AC (50 Hz) on HF Ballast Compatible
HELVAR	Ballast type	10nc / Ref. no	Lamps on ballast	*
	EL3/4x14ngn5			*
	EL1x14-35ngn5			*
	EL2x14-35ngn5			
	EL2x14-35iDim			
	EL2x14-35s			
TRIDONIC ATCO	PC 1x14 T5 TEC Ip	87500211	1	
	PCA 2x14 T5 BASIC Ip	22185077	2	
	PC 3/4x14 T5 TOP Ip	22185220	3	
	PC 3/4x14 T5 PRO Ip	22185211	3	
	PC 4x14 T5 TEC Ip	87500214	4	**
	PC 3/4x14 T5 TOP Ip	22185220	4	
	PC 3/4x14 T5 PRO Ip	22185211	4	
	PC 1x14-35 T5 TOP Ip	22185157	1	
	PC 1x14-35 T5 PRO Ip	22185147	1	
	PC 1x14-21W BASIC sI	22176001	1	
	PC 1/14-21-28-35 T5 PRO Ip	22087725	1	
	PC 1/14-21-28-35 T5 PRO Ip	22176096	1	
	PC 2x14-28 T5 TOP Ip	22185158	2	
	PC 2x14-35 T5 PRO Ip	22185148	2	
	PC 2/14-35/49/54 T5 PRO-M Ip	22176186	2	
	PC 1/14-35/49/80 T5 PRO-M Ip	22176184	1	
	PC 2/14-21/24/39 T5 PRO-M Ip	22176185	2	
	PCA 2x14/24 T5 ECO Ip	22185095	2	
	PCA 2x14/24 T5 EXCEL one4all Ip	22185104	2	
	PCA 3x14/24 T5 EXCEL one4all Ip	22176209	3	
	PCA 3x14/24 T5 ECO Ip	22176211	3	
	PCA 3x14/24 T5 EXCITE Ip	28000307	3	
	PCA 4x14/24 T5 EXCEL one4all Ip	22176210	4	
	PCA 4x14/24 T5 ECO Ip	22176212	4	
	PCA 4x14/24 T5 EXCITE Ip	28000308	4	
VOSSLOH-SCHWABE	ELXc 114.238	183122	1	
	ELXc 214.240	183124	2	**
	ELXc 414.227	183109	3	
	ELXc 414.868	188438	3	
	ELXc 414.227	183109	4	
	ELXc 414.242	183126	4	
	ELXc 414.868	188438	4	
	ELXc 135.220	188921	1	
	ELXc 228.229	183111	1	
	ELXc 228.229	183111	2	
	ELXc 135.231	183113	1	
	ELXd 135.823	188717	1	
	ELXc 228.229	183111	2	
	ELXc 235.857	188094	2	*
	ELXc 235.221	188922	2	
	ELXd 235.735	183059	2	
	ELXc 139.632	188945	1	
	ELXd 124.600	188329	1	Dim
	ELXd 124.607	188336	1	
	ELXc 239.635	188948	2	**
	ELXd 224.601	188330	2	Dim (3)
	ELXd 224.608	188337	2	Dim (3)
	ELXd 324.623	188597	3	** / Dim (3)
	ELXd 324.626	188597	3	** / Dim (3)
	ELXd 424.624	188598	4	
	ELXd 424.628	188598	4	

(1) Do not use in closed luminaires
(2) Audible noise might be detected when used in silent applications
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185

Q3-Q4 2025

MASTER LEDtube HF T5 HE - 600 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div></div><div></div></div>			MAS LEDtube HF 600mm HE 7W 8xx T5
			Model number / (Short) EOC code: 9290037951 / 8720169 30966100 9290037952 / 8720169 30968500 9290037953 / 8720169 30970800
			AC (50 Hz) on HF Ballast Compatible
BAG-HUECO	Ballast type	10nc / Ref. no	Lamps on ballast
	BCS14.3-4FR-01/220-240	10052868	3
	BCS14.3-4FR-01/220-240	10052868	4
	BCS35.1FX-11/220-240	10077579	1
	BCS35.2FX-11/220-240	10077580	2
	MLS54.2F-01/220-240	166412	2
	MLD39.1FR-11/220-240/DALI	10097811	1
	MLS39.1-2FR-11/220-240	10092026	1
	MLS39.1-2FR-11/220-240	10092026	2
	MLD39.2FR-11/220-240/DALI	10092117	2
	MLD14/24.3FR-04/220-240/DALI	10105150	3
	MLS14/24.3-4FR-11/220-240	10095345	3
	MLS14/24.3-4FR-11/220-240	10095345	4
	MLS80.1F-01/220-240		1
	D35.1-23051E		1
	SCS35.1F-01/220-240		1
	SCS14.3-4F-01/220-240		3
	SCS14.3-4F-01/220-240		4
	D14.3-23051E		1
TCL	BTL-414	87500211	3
	BTL-414	22185077	4
Arlen EFA	BE - 214-35 - T5	22185211	2
Others	LYZ-1X14WT5-240		1
Others	Direct mains	22185147	

- (1) Do not use in closed luminaires
(2) Audible noise might be detected when used in silent applications
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185

MASTER LEDtube HF InstantFit HE T5

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.
Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp.



Q3-Q4 2025

MASTER LEDtube HF T5 HE - 900 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div><div>Works with High Frequency ballast (HF)</div></div><div><div>InstantFit™ HASSLE FREE INSTALLATION</div></div></div>			MAS LEDtube HF 900mm HE 11.5W 8xx T5
			Model number / (Short) EOC code: 9290035968 / 8720169 16319500 9290035969 / 8720169 16321800 9290035970 / 8720169 16323200
			AC (50 Hz) on HF Ballast Compatible
PHILIPS	Ballast type	12nc	Lamps on ballast
	HF-MATCHBOX BLUE 121 LH TL5	9137004183	1
	HF-E 121 TL5 II	9137130416	1
	EB-Ci 1-2 14-28W	9137130432	1
	HF-P 1 14-35 TL5 HE III IDC 4CIC	9137130310	1
	HF-P 1 14-35 TL5 HE III IDC C2E	9137130310	1
	HF-R Es 114-35 TL5	9137006616	1
	HF-R 121 TL5 220-240	9137001288	1
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006708	1
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006983	1
	HF-R 114-35 TL5 EII	9137006198	1
	HF-S 114-35 TL5 II	9137130429	1
	HF-S 1 14-35 TL5 HE II	9137130420	1
	HF-P 1 14-35 TL5 HE EII 220-240	9137006129	1
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2
	EB-Ci 1-2 14-28W	9137130432	2
	HF-P 2 14-35 TL5 HE III IDC	9137130311	2
	HF-S 2 14-35 TL5 HE II	9137130421	2
	HF-R Es 214-35 TL5	9137006617	2
	HF-Pi 2 14/21/24/39 TL5 EII 220-240	9137006242	2
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006709	2
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006984	2
	HF-R 214-35 TL5 EII	9137006195	2
	HF-S 214-28 TL5 II	9137130430	2
	HF-S 3/414 TL5 II	9137130330	3
	HF-Pi I 14/21/24/39 TL5 EII 220-240	9137006240	1
	HF-S 114-21 TL5 II	9137130328	1
OSRAM	EZ-T5 1x21/220		1
	EZP5 1x21/220-230		1
	QT-FIT5 1x14-35		1
	QTP5 1x14-35		1
	QT-FIT5 2x14-35		2
	QTP5 2x14-35		2
	QTi 1x21/39 Dim		1
	QTi DALI 1x21/39 Dim		1
	QTi 2x21/39 Dim		2
	QTi DALI 2x21/39 Dim		2
	Qti 2x28/54		2
	QTi 1x14/24/21/39 GII		1
	QTi 2x14/24/21/39 GII		2
HELVAR	EL1x14-35ngn5		1
	EL2x14-35ngn5		2
	EL2x14-35iDim		2
	EL2x14-35s		2
TRIDONIC ATCO	PC 1x21 T5 TEC Ip	87500217	1
	PC 1x14-35 T5 TOP Ip	22185157	1
	PC 1x14-35 T5 PRO Ip	22185147	1
	PC 1x14-21W BASIC sI	22176001	1
	PC 1/14-21-28-35 T5 PRO Ip	22087725	1
	PC 1/14-21-28-35 T5 PRO Ip	22176096	1
	PC 2x14-28 T5 TOP Ip	22185158	2
	PC 2x14-35 T5 PRO Ip	22185148	2
	PC 2/14-35/49/54 T5 PRO-M Ip	22176186	2
	PCA 1x21/39 T5 ECO IP	22185101	1
	PCA 1x21/39 T5 EXCEL one4all Ip	22185110	1
	PC 2/14-21/24/39 T5 PRO-M Ip	22176185	2
	PCA 2x21/39 T5 ECO IP	22185102	2
	PCA 2x21/39 T5 EXCEL one4all Ip	22185111	2

(1) Do not use in closed luminaires
(2) Audible noise might be detected when used in silent applications
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185
(5) Set max Dimlevel to Dali step 240

Q3-Q4 2025

MASTER LEDtube HF T5 HE - 900 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div></div><div></div></div>			MAS LEDtube HF 900mm HE 11.5W 8xx T5
			Model number / (Short) EOC code: 9290035968 / 8720169 16319500 9290035969 / 8720169 16321800 9290035970 / 8720169 16323200
			AC (50 Hz) on HF Ballast Compatible
VOSSLOH-SCHWABE	Ballast type	12nc	Lamps on ballast
	ELXc 135.220	188921	1
	ELXc 228.229	183111	1
	ELXc 228.229	183111	2
	ELXc 135.231	183113	1
	ELXc 135.856	188093	1
	ELXd 135.724	188932	1
	ELXd 135.823	188717	1
	ELXc 235.857	188094	2
	ELXc 235.221	188922	2
	ELXd 235.725	188933	2
	ELXd 235.735	183059	2
	ELXc 139.632	188945	1
	ELXd 139.609	188338	1
	ELXd 139.602	188331	1
	ELXc 239.635	188948	2
	ELXd 239.610	188339	2
	ELXd 239.621	188350	2
BAG-HUECO	BCS35.1FX-11/220-240	10077579	1
	BCD35.1F-01/220-240/1-10V	10097244	1
	BCS35.2FX-11/220-240	10077580	2
	MLS54.2F-01/220-240	166412	2
	MLD39.1FR-11/220-240/DALI	10097811	1
	MLS39.1-2FR-11/220-240	10092026	1
	MLS39.1-2FR-11/220-240	10092026	2
	MLD39.2FR-11/220-240/DALI	10092117	2
TCI	BTL 414	137999/414L	3
ELT	BE - 214-35 - T5		2
Others	Direct mains		

- (1) Do not use in closed luminaires
(2) Audible noise might be detected when used in silent applications
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185
(5) Set max Dimlevel to Dali step 240

MASTER LEDtube HF InstantFit HE T5

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.
Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp.


Q3-Q4 2025

MASTER LEDtube HF T5 HE - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	



	Ballast type	12nc	Lamps on ballast	MAS LEDtube HF 1200mm HE 16.5W 8xx T5
PHILIPS	HF-P 128 TL5 220-240	9137001366	1	Model number / (Short) EOC code: 9290013910B / 8718696 74329400 9290013911B / 8718696 74331700 9290013912B / 8718696 74333100
	EB-C 128 TL5 II	9137130404	1	AC (50 Hz) on HF Ballast Compatible
	EB-C 228 TL5 II	9137130406	2	**
	HF-S 128-35 TL5 II	9137130332	1	**
	HF-Pi 1 28/35/49/54 TL5 EII 220-240	9137006241	1	
	HF-Ri TD 1 28/35/49/54 TL5 E+	9137006956	1	Dim (2) (3)
	HF-Pi 1 28/35/49/80 TL5 EII	9137006525	1	
	EB-C 128 TL5	9137131964	1	**
	EB-Ci 1-2 14-28W	9137130432	1	
	HF-P 1 14-35 TL5 HE III IDC 4CIC	9137130310	1	
	HF-P 1 14-35 TL5 HE III IDC C2E	9137130310	1	
	HF-R 114-35 TL5 EII	9137006198	1	Dim (2) (3)
	BLUE 128 LH TL5	9137004199	1	**
	HF-Pi 1 28/35/49/80 TL5 EII 220-240	9137006525	1	
	HF-S 114-35 TL5 II	9137130429	1	*
	HF-S 1 14-35 TL5 HE II	9137130420	1	
	HF-P 1 14-35 TL5 HE EII 220-240	9137006129	1	
	HF-Ri TD 1 28-35-49-54 TL5 E+	9137006560	1	
	EB-C 128 TL5 II	9137130404	2	**
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2	**
	HF-Pi 2 28/35/49/80 TL5 EII	9137006526	2	*
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006958	2	* / Dim (2) (3)
	EB-C 228 TL5	9137131971	2	
	EB-Ci 1-2 14-28W	9137130432	2	
	HF-P 2 14-35 TL5 HE III IDC	9137130311	2	
	HF-S 2 14-35 TL5 HE II	9137130421	2	
	HF-R Es 214-35 TL5	9137006617	2	Dim
	HF-R T 228 TL5 220-240	9137001863	2	**
	HF-Pi 2 14/21/24/39 TL5 EII 220-240	9137006242	2	
	HF-Pi 2 28/35/49/80 TL5 EII 220-240	9137006526	2	**
	HF-R 214-35 TL5 EII	9137006195	2	* / Dim (3)
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006561	2	Dim (2) (3)
	HF-S 214-28 TL5 II	9137130430	2	*
	HF-R Es 114-35 TL5	9137006616	1	Dim
	HF-S 114-21 TL5 II	9137130328	1	
OSRAM	EZP5 2x28/220-230		2	**
	QT-FIT5 1x14-35		1	*
	QTP5 1x14-35		1	*
	QT-FIT5 2x14-35		2	
	QTP5 2x14-35		2	
	Qti 1x28/54/35/49 GII		1	
	Qti 1x28/54 Dim		1	** / (1)
	Qti DALI 1x28/54 Dim		1	** / (1)
	Qti 2x28/54/35/49 GII		2	*
	Qti 2x28/54 Dim		2	** / (1)
	Qti DALI 2x28/54 Dim		2	** / (1)
	Qti 2x28/54		2	
HELVAR	EL1x14-35ngn5		1	
	EL2x14-35ngn5		2	
	EL2x14-35iDim		2	
	EL2x14-35s		2	*

(1) Do not use in closed luminaires
(2) Audible noise might be detected when used in silent applications
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185
(5) Set max Dimlevel to Dali step 240



Q3-Q4 2025

MASTER LEDtube HF T5 HE - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div><div>Works with High Frequency ballast (HF)</div></div><div><div>InstantFit™ HASSLE FREE INSTALLATION</div></div></div>			MAS LEDtube HF 1200mm HE 16.5W 8xx T5
			Model number / (Short) EOC code: 9290013910B / 8718696 74329400 9290013911B / 8718696 74331700 9290013912B / 8718696 74333100
			AC (50 Hz) on HF Ballast Compatible
TRIDONIC ATCO	Ballast type	12nc	Lamps on ballast
	PCA 1x28 T5 BASIC Ip	22185086	1
	PCA 2x28 T5 BASIC Ip	22185087	2
	PC 1x14-35 T5 TOP Ip	22185157	1
	PC 1x14-35 T5 PRO Ip	22185147	1
	PC 1/14-21-28-35 T5 PRO Ip	22087725	1
	PC 1/14-21-28-35 T5 PRO Ip	22176096	1
	PC 2x14-28 T5 TOP Ip	22185158	2
	PC 2x14-35 T5 PRO Ip	22185148	2
	PCA 1x28/54 T5 ECO Ip	22185099	1
	PCA 1x28/54 T5 EXCEL one4all Ip	22185108	1
	PCA 2x28/54 T5 ECO Ip	22185100	2
	PCA 2x28/54 T5 EXCEL one4all Ip	22185109	2
	PC 2/14-35/49/54 T5 PRO-M Ip	22176186	2
	PC 1/14-35/49/80 T5 PRO-M Ip	22176184	1
	PC 1X28/54 T5 EXCEL one4all Ip	22176174	1
VOSSLOH-SCHWABE	ELXc 328.230	183112	3
	ELXc 135.220	188921	1
	ELXc 228.229	183111	1
	ELXc 228.229	183111	2
	ELXc 135.231	183113	1
	ELXc 135.856	188093	1
	ELXd 135.724	188932	1
	ELXd 135.823	188717	1
	ELXc 235.857	188094	2
	ELXc 235.221	188922	2
	ELXd 235.725	188933	2
	ELXd 235.735	183059	2
	ELXc 154.633	188946	1
	ELXd 154.611	188340	1
	ELXd 154.603	188332	1
	ELXc 254.636	188949	2
	ELXd 254.612	188341	2
	ELXd 254.604z	188333	2
BAG-HUECO	BCS35.1FX-11/220-240	10077579	1
	BCD35.1F-01/220-240/1-10V	10097244	1
	BCS35.2FX-11/220-240	10077580	2
	MLS54.2F-01/220-240	166412	2
	MLD54.2FR-11/220-240/DALI	10092121	2
	MLD54.1FR-11/220-240/DALI	10097815	1
	MLS80.1/54.2FR-11/220-240	10071609	1
	MLS80.1/54.2FR-11/220-240	10071609	2
	MLS80.1FR-11/220-240	10071608	1
ELT	BE - 214-35 - T5 2		2
GELEC	CDZ128LY10		1
Others	Direct mains		

(1) Do not use in closed luminaires
(2) Audible noise might be detected when used in silent applications
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185
(5) Set max Dimlevel to Dali step 240

MASTER LEDtube HF InstantFit HE T5

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.
Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp.

MASTER LEDtube HF T5 HE - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	



	Ballast type	12nc	Lamps on ballast	MAS LEDtube HF 1500mm HE 20W 8xx T5
PHILIPS	HF-S 128-35 TL5 II	9137130332	1	Model number / (Short) EOC code: 9290013913B / 8718696 74335500 9290013914B / 8718696 74337900 9290013915B / 8718696 74339300
	HF-Pi 1 28/35/49/54 TL5 EII 220-240	9137006241	1	AC (50 Hz) on HF Ballast Compatible
	HF-Ri TD 1 28/35/49/54 TL5 E+	9137006956	1	*
	HF-Ri TD 1 35/49/80 TL5 E+	9137006957	1	Dim (2) (3)
	HF-Pi 1 28/35/49/80 TL5 EII	9137006525	1	Dim
	HF-P 1 14-35 TL5 HE III IDC 4CIC	9137130310	1	*
	HF-P 1 14-35 TL5 HE III IDC C2E	9137130310	1	*
	HF-R Es 114-35 TL5	9137006616	1	*
	HF-R 114-35 TL5 EII	9137006198	1	* / Dim
	HF-P 135 TL5 220-240	9137001367	1	* / Dim (2) (3)
	HF-Pi 1 28/35/49/80 TL5 EII 220-240	9137006525	1	*
	HF-S 114-35 TL5 II	9137130429	1	*
	HF-S 1 14-35 TL5 HE II	9137130420	1	*
	HF-Ri TD 1 28-35-49-54 TL5 E+	9137006560	1	Dim
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2	
	HF-Pi 2 28/35/49/80 TL5 EII	9137006526	2	**
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006958	2	Dim (2) (3)
	HF-P 2 14-35 TL5 HE III IDC	9137130311	2	*
	HF-S 2 14-35 TL5 HE II	9137130421	2	*
	HF-R Es 214-35 TL5	9137006617	2	Dim
	HF-Pi 2 28/35/49/80 TL5 EII 220-240	9137006526	2	*
	HF-R 214-35 TL5 EII	9137006195	2	Dim (3)
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006561	2	Dim (2) (3)
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006709	2	Dim (2) (3)
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006708	1	Dim (2) (3)
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006983	1	Dim (4)
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006984	2	Dim (2) (3)
	HF-P 135 TL5 220-240	9137001726	1	
	HF-Pi 2 14/21/24/39 TL5 EII 220-240	9137006242	2	**
	HF-R 135 TL5 220-240	9137001180	1	*/Dim(3)
OSRAM	QT-FIT5 1x14-35		1	**
	QTP5 1x14-35		1	*
	QT-FIT5 2x14-35		2	
	QTP5 2x14-35		2	
	Qti 1x35/49/80 GII		1	
	Qti 1x35/49/80		1	
	Qti 1x28/54/35/49 GII		1	
	Qti 1x35/49/80 Dim		1	*
	Qti DALI 1x35/49/80 Dim		1	*
	Qti 2x35/49/80 GII		2	
	Qti 2x28/54/35/49 GII		2	
	Qti 2x35/49 Dim		2	*
	Qti DALI 2x35/49 Dim		2	*
	Qti 2x35/49/80 Dim		2	Dim (3)
	Qti DALI 2x35/49/80 Dim		2	
	Qti 2x28/54		2	
HELVAR	EL1x14-35ngn5		1	*
	EL2x14-35ngn5		2	
	EL2x14-35iDim		2	
	EL2x14-35s		2	
TRIDONIC ATCO	PCA 1x35 T5 BASIC Ip	22185080	1	
	PC 2x35 T5 TOP Ip (28000047)	28000047	2	*
	PC 2x35 T5 TOP Ip (87500292)	87500292	2	*
	PCA 2x35 T5 BASIC Ip	22185081	2	
	PC 2/35 T5 INDUSTRY	86459172	2	
	PC 1x14-35 T5 TOP Ip	22185157	1	*
	PC 1X14-35 T5 PRO Ip	22185147	1	*
	PC 1/14-21-28-35 T5 PRO Ip	22087725	1	
	PC 1/14-21-28-35 T5 PRO Ip	22176096	1	
	PC 2x14-35 T5 PRO Ip	22185148	2	
	PCA 1x35/49/80 T5 ECO Ip	22185096	1	
	PCA 1x35/49/80 T5 EXCEL one4all Ip	22185105	1	
	PCA 1x35/49/80 T5 EXCEL one4all Ip	22176172	1	
	PCA 2x35/49 T5 EXCEL one4all Ip	22185106	2	
	PCA 2x35/49 T5 ECO Ip	22185097	2	
	PC 2/14-35/49/54 T5 PRO-M Ip	22176186	2	*
	PC 1/14-35/49/80 T5 PRO-M Ip	22176184	1	

(1) Do not use in closed luminaires
(2) Audible noise might be detected when used in silent applications
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185
(5) Set max Dimlevel to Dali step 240

Q3-Q4 2025

MASTER LEDtube HF T5 HE - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

<div><div></div><div></div></div>			MAS LEDtube HF 1500mm HE 20W 8xx T5
			Model number / (Short) EOC code: 9290013913B / 8718696 74335500 9290013914B / 8718696 74337900 9290013915B / 8718696 74339300
			AC (50 Hz) on HF Ballast Compatible
VOSSLOH-SCHWABE	Ballast type	12nc	Lamps on ballast
	ELXc 235.232	183114	2
	ELXc 135.220	188921	1
	ELXc 135.231	183113	1
	ELXc 135.856	188093	1
	ELXd 135.724	188932	1
	ELXd 135.823	188717	1
	ELXc 235.857	188094	2
	ELXc 235.221	188922	2
	ELXd 235.725	188933	2
	ELXd 235.735	183059	2
	ELXc 154.633	188946	1
	ELXc 180.634	188947	1
	ELXd 180.613	188342	1
	ELXd 180.605	188334	1
	ELXc 254.636	188949	2
	ELXd 249.614	188343	2
	ELXc 280.637	188950	2
	ELXd 249.606	188335	2
	ELXd 280.630	188604	2
BAG-HUECO	BCS35.1FX-11/220-240	10077579	1
	BCD35.1F-01/220-240/1-10V	10097244	1
	BCS35.2FX-11/220-240	10077580	2
	BCD35.2F-01/220-240/1-10V	10097294	2
	MLD54.1FR-11/220-240/DALI	10097815	1
	MLS80.1/54.2FR-11/220-240	10071609	1
	MLS80.1FR-11/220-240	10071608	1
	MLD80.1FR-11/220-240/DALI	10097820	1
	MLD54.2FR-11/220-240/DALI	10092121	2
	MLD80.2FR-11/220-240/DALI	10101905	2
	MLS54.2F-01/220-240	166412	2
	MLS80.1/54.2FR-11/220-240	10071609	2
Arden EFA	BE - 214-35 - T5		
Others	Direct mains		

- (1) Do not use in closed luminaires
(2) Audible noise might be detected when used in silent applications
(3) Do not Dim below 10% / Dali step 170
(4) Do not Dim below 20% / Dali step 185
(5) Set max Dimlevel to Dali step 240

MASTER LEDtube HF InstantFit HE T5

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.
Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp.

CorePro LEDtube HF T5 HO - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
	Ballast is not compatible.	



	Ballast type	12nc	Lamps on ballast	CorePro LEDtube HF 1200mm HO 26.7W 8xx T5
PHILIPS	HF-P 154/155 TL5 HO/PL-L III IDC 4CIC	9137130282	1	Model number / (Short) EOC code: 9290037750 / 8720169 29558200 9290037751 / 8720169 29560500 9290037752 / 8720169 29562900
	HF-P 154/155 TL5 HO/PL-L III IDC C2E	9137130282	1	AC (50 Hz) on HF Ballast Compatible
	HF-R 154 TL5 220-240	9137001291	1	*
	HF-R 154 TL5 220-240	9137006088	1	*
	HF-E 1/2 54 TL5 II	9137130408	1	**
	HF-R TD 154 TL5 EII 220-240	9137006064	1	*
	HF-P 154 TL5 HO EII 220-240	9137006133	1	
	HF-S 154 TL5 II 4CIC	9137130336	1	
	HF-S 154 TL5 II C2E	9137130336	1	
	HF-R Es 154 TL5	9137006618	1	
	HF-R DALI 154 TL5 220-240	9137001335	1	
	HF-Pi 1 28/35/49/54 TL5 EII 220-240	9137006241	1	**
	HF-Ri TD 1 28/35/49/54 TL5 E+	9137006956	1	
	HF-Ri TD 1 28-35-49-54 TL5 E+	9137006560	1	**
	HF-S 254 TL5 II 4CIC	9137130337	2	*
	HF-S 254 TL5 II C2E	9137130337	2	*
	HF-E 1/2 54 TL5 II	9137130408	2	*
	HF-R Es 254 TL5	9137006619	2	
	HF-P Xt 254 TL5 EII 220-240	9137006300	2	**
	HF-P 254/255 TL5 HO/PL-L III IDC 4CIC	9137130283	2	
	HF-P 254/255 TL5 HO/PL-L III IDC C2E	9137130283	2	
	HF-R 254 TL5 EII	9137006089	2	
	HF-R TD 254 TL5 EII	9137006065	2	
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2	
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2	
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006958	2	
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006561	2	
OSRAM	QTP-OPTIMAL 1x54-58		1	
	QT-FIT 5/8 1x54-58		1	
	QTP5 1x54		1	
	QTP-OPTIMAL 2x54-58		2	
	QT-FIT 5/8 2x54-58		2	*
	QTP5 2x54		2	
	QT-FQ 2x54/230-240 DIM		2	
	Qti 1x28/54/35/49 GII		1	
	Qti 1x28/54 DIM		1	
	Qti DALI 1x28/54 DIM		1	
	Qti 2x28/54/35/49 GII		2	*
	Qti 2x28/54 DIM		2	
	Qti DALI 2x28/54 DIM		2	
	Qti 2x28/54		2	
HELVAR	EL1x54ngn5		1	**
	EL1x54s		1	
	EL1x54iDim		1	
	EL1x54sc		1	**
	EL2x54ngn5		2	
	EL2x54iDim		2	
	EL2x54sc		2	
TRIDONIC ATCO	PC 1x54 T5 PRO Ip	22185155	1	
	PC 1x54 T5 TOP Ip	22185165	1	*
	PC 1/54 T5 INDUSTRY	89800458	1	
	PCA 1x54 T5 BASIC Ip	22185088	1	
	PC 2x54 T5 PRO Ip	22185156	2	
	PC 2x54 T5 TOP Ip	22185166	2	
	PC 2/54 T5 INDUSTRY	89800459	1	
	PCA 2x54 T5 BASIC Ip	22185089	2	
	PCA 1x28/54 T5 ECO Ip	22185099	1	
	PCA 1x28/54 T5 EXCEL one4all Ip	22185108	1	
	PCA 2x28/54 T5 ECO Ip	22185100	2	
	PCA 2x28/54 T5 EXCEL one4all Ip	22185109	2	
	PC 2/14-35/49/54 T5 PRO-M Ip	22176186	2	



Q3-Q4 2025

CorePro LEDtube HF T5 HO - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
	Ballast is not compatible.	

<div><div></div><div></div></div>			CorePro LEDtube HF 1200mm HO 26.7W 8xx T5
			Model number / (Short) EOC code: 9290037750 / 8720169 29558200 9290037751 / 8720169 29560500 9290037752 / 8720169 29562900
			AC (50 Hz) on HF Ballast Compatible
VOSSLOH-SCHWABE	Ballast type	12nc	Lamps on ballast
	ELXc 254.865	188618	2
	ELXc 154.633	188946	1
	ELXd 154.611	188340	1
	ELXc 254.636	188949	2
	ELXd 254.612	188341	2
	ELXd 254.604	188333	2
BAG-HUECO	BCS54.1FX-11/220-240	10077585	1
	BCS54.1FR-01/220-240	10075881	1
	BCS54.2FX-11/220-240	10077586	2
	BCD54.2F-01/220-240/1-10V	10097298	2
	MLD54.1FR-11/220-240/DALI	10097815	1
	MLS80.1/54.2FR-11/220-240	10071609	1
	MLS80.1FR-11/220-240	10071608	1
	MLD80.1FR-11/220-240/DALI	10097820	1
	MLD54.2FR-11/220-240/DALI	10092121	2
	MLS54.2F-01/220-240	166412	2
	MLS80.1/54.2FR-11/220-240	10071609	2
	MLS80.1F-01/220-240	166312	1
TCI	BTLT 254	137999/54	2
Arlen EFA	HFL 254-58M		2
Others	Direct mains		

CorePro LEDtube HF T5 HO - 1200mm

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts.

Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube.

Please also check and follow the instructions of HF ballast manufacturers for installation instructions.



Always check the latest update of the compatibility list on www.philips.com/ledtube

CorePro LEDtube HF T5 HO - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
	Ballast is not compatible.	

<div><div></div></div>				CorePro LEDtube HF 1500mm HO 26.7W 8xx T5
				Model number / (Short) EOC code: 99290037753 / 8720169 29564300 9290037754 / 8720169 29566700 9290037755 / 8720169 29568100
				AC (50 Hz) on HF Ballast Compatible
PHILIPS	Ballast type	12nc	Lamps on ballast	*
	HF-P 1 49 TL5 HO 220-240	9137001660	1	
	HF-P 149 TL5 HO EII 220-240	9137006132	1	
	HF-P 149 TL5 HO III IDC C2E	9137130280	1	
	HF-P 149 TL5 HO III IDC 4CIC	9137130280	1	*
	HF-S 149 TL5 II 4CIC	9137130334	1	**
	HF-S 149 TL5 II C2E	9137130334	1	*
	HF-E 1/2 49 TL5 II	9137130407	1	
	HF-P 149 TL5 220-240	9137001177	1	
	HF-R 149 TL5 220-240	9137001181	1	**
	HF-R TD 149 TL5 EII 220-240	9137006062	1	**
	HF-Pi 1 28/35/49/54 TL5 EII 220-240	9137006241	1	
	HF-Ri TD 1 28/35/49/54 TL5 E+	9137006956	1	
	HF-Ri TD 1 35/49/80 TL5 E+	9137006957	1	
	HF-Ri TD 1 35/49/80 TL5 E+	9137006957	1	
	HF-R Es 149 TL5	9137006620	1	*
	HF-P Xt 149 TL5 EII 220-240	9137006297	1	
	HF-Pi 1 28/35/49/80 TL5 EII	9137006525	1	**
	HF-R 149 TL5 EII	9137006086	1	**
	HF-Pi 1 28/35/49/80 TL5 EII 220-240	9137006525	1	
	HF-R 149 TL5 EII 220-240	9137006086	1	*
	HF-Ri TD 1 28-35-49-54 TL5 E+	9137006560	1	
	HF-P 249 TL5 220-240	9137001240	2	
	HF-P 249 TL5 HO III IDC 4CIC	9137130281	2	
	HF-P 249 TL5 HO III IDC C2E	9137130281	2	*
	HF-E 1/2 49 TL5 II	9137130407	2	
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2	
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2	
	HF-Pi 2 28/35/49/80 TL5 EII	9137006526	2	**
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006958	2	
	HF-S 249 TL5 II 4CIC	9137130335	2	
	HF-S 249 TL5 II C2E	9137130335	2	
	HF-R Es 249 TL5	9137006621	2	*(1)
	HF-P Xt 249 TL5 EII 220-240	9137006298	2	
	HF-P 249 TL5 220-240	9137001324	2	
	HF-R 249 TL5 EII	9137006087	2	
	HF-Pi 2 28/35/49/80 TL5 EII 220-240	9137006526	2	
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006561	2	
OSRAM	QT-FQ 1X49/230-240 CW	A45625D00DG	1	
	QTP5 1x49 (SHORTER VERSION)	A63946E01DG	1	
	QT-FIT5 1X49	AA7471701DG	1	
	QTP5 2X49	AA4002200DG	2	*
	QT-FIT5 2X49	AA4068801DG	2	**
	QTP5 1x49(longerVERSION)		1	
	Qti 1x35/49/80 GII	AA3529702OL	1	
	Qti 1x35/49/80		1	
	Qti 1x28/54/35/49 GII	AA3529600DG	1	
	Qti 1x35/49/80 DIM		1	** (2)
	Qti DALI 1x35/49/80 DIM		1	**
	Qti 2x35/49/80 GII	A74908402DG	2	**
	Qti 2x28/54/35/49 GII	AA3529900DG	2	**
	Qti 2x35/49 DIM		2	**
	Qti DALI 2x35/49 DIM		2	
	Qti 2x35/49/80 DIM		2	**
	Qti DALI 2x35/49/80 DIM	AA3864303OL	2	**
HELVAR	EL1x49s-u		1	**
	EL1x49s		1	**
	EL1X49ngn5		1	**
	EL1x49sc		1	
	EL2x49s		2	
	EL2X49ngn5		2	

(1) Do not use in closed luminaires
(2) Do not use in combination with a motion sensor

Q3-Q4 2025

CorePro LEDtube HF T5 HO - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
	Ballast is not compatible.	

<div><div></div><div></div></div>			CorePro LEDtube HF 1500mm HO 26.7W 8xx T5	
			Model number / (Short) EOC code: 99290037753 / 8720169 29564300 9290037754 / 8720169 29566700 9290037755 / 8720169 29568100	
			AC (50 Hz) on HF Ballast Compatible	
TRIDONIC ATCO	Ballast type	12nc	Lamps on ballast	**
	PC 1/49 T5 PRO Ip	22087917	1	
	PC 1x49 T5 PRO Ip	22185153	1	
	PC 1/49 T5 INDUSTRY	89800456	1	**
	PC 1x49 T5 TOP Ip	22185163	1	
	PCA 1x49 T5 BASIC Ip	22185082	1	**
	PC 2/49 T5 PRO Ip	22087646	2	**
	PCA 2/49 T5 ECO Ip	22089499	2	**
	PC 2x49 T5 PRO Ip	22185154	2	
	PC 2/49 T5 INDUSTRY	89800457	2	**
	PC 2x49 T5 TOP Ip	22185164	2	
	PCA 2x49 T5 BASIC Ip	22185083	2	
	PCA 1x35/49/80 T5 ECO Ip	22185096	1	
	PCA 1x35/49/80 T5 EXCEL one4all Ip	22185105	1	
	PCA 1x35/49/80 T5 EXCEL one4all Ip	22176172	1	
	PCA 2x35/49 T5 EXCEL one4all Ip	22185106	2	
	PCA 2x35/49 T5 ECO Ip	22185097	2	
	PC 2/14-35/49/54 T5 PRO-M Ip	22176186	2	
	PC 1/14-35/49/80 T5 PRO-M Ip	22176184	1	
VOSSLOH-SCHWABE	ELXc 149.234	183116	1	*
	ELXc 249.235	183117	2	
	ELXc 154.633	188946	1	
	ELXc 180.634	188947	1	**
	ELXd 180.605	188334	1	**
	ELXc 254.636	188949	2	
	ELXd 249.614	188343	2	**
	ELXc 280.637	188950	2	**
	ELXd 249.606	188335	2	
	ELXd 280.630	188604	2	**
BAG-HUECO	BCS49.1FX-11/220-240	10077583	1	
	BCD49.1F-01/220-240	10097247	1	**
	SCS49.1F-01/220-240	166512	1	*
	BCS49.2FX-11/220-240	10077584	2	**
	BCD49.2F-01/220-240	10097297	2	**
	MLD54.1FR-11/220-240/DALI	10097815	1	
	MLS80.1/54.2FR-11/220-240	10071609	1	
	MLS80.1FR-11/220-240	10071608	1	
	MLD80.1FR-11/220-240/DALI	10097820	1	
	MLD54.2FR-11/220-240/DALI	10092121	2	**
	MLD80.2FR-11/220-240/DALI	10101905	2	
	MLS54.2F-01/220-240	166412	2	
	MLS80.1/54.2FR-11/220-240	10071609	2	
	MLS80.1F-01/220-240	166312	1	
Arlen EFA	BTLT 149	137998/149	1	*
	BTLT 249	137999/49	2	
Others	Direct mains			

(1) Do not use in closed luminaires
(2) Do not use in combination with a motion sensor

CorePro LEDtube HF T5 HO - 1500mm


General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.
Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts.
Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube.
Please also check and follow the instructions of HF ballast manufacturers for installation instructions.
Always check the latest update of the compatibility list on www.philips.com/ledtube

CorePro LEDtube HF T5 HE - 600 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
	Ballast is not compatible.	



			CorePro LEDtube HF 600mm HE 7.1W 8xx T5
			Model number / (Short) EOC code: 9290037741 / 8720169 29540700 9290037742 / 8720169 29542100 9290037743 / 8720169 29544500
			AC (50 Hz) on HF Ballast Compatible
PHILIPS	Ballast type	12nc	Lamps on ballast
	BLUE 114 LH TL/PLS/PLC	9137004217	1
	EB-C 114 TL5	9137131962	1
	EB-Ci 1-2 14-28W	9137130432	1
	HF-E 114 TL5 II	9137130414	1
	HF-P 1 14-35 TL5 HE III IDC 4CIC	9137130310	1
	HF-P 1 14-35 TL5 HE III IDC C2E	9137130310	1
	HF-R 114 TL5 220-240	9137001287	1
	HF-R Es 114-35 TL5	9137006616	1
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006708	1
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006983	1
	HF-R 114-35 TL5 EII	9137006198	1
	HF-S 114-35 TL5 II	9137130429	1
	HF-S 1 14-35 TL5 HE II	9137130420	1
	HF-P 1 14-35 TL5 HE EII 220-240	9137006129	1
	EB-C 128 TL5 II	9137130404	2
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2
	EB-C 214 TL5	9137131969	2
	EB-Ci 1-2 14-28W	9137130432	2
	HF-E 214 TL5 II	9137130415	2
	HF-P 2 14-35 TL5 HE III IDC	9137130311	2
	HF-S 2 14-35 TL5 HE II	9137130421	2
	HF-R Es 214-35 TL5	9137006617	2
	HF-R DALI 214 TL5 220-240	9137001313	2
	HF-Pi 2 14/21/24/39 TL5 EII 220-240	9137006242	2
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006709	2
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006984	2
	HF-R 214-35 TL5 EII	9137006195	2
	HF-S 214-28 TL5 II	9137130430	2
	EB-C 314 TL5	9137131967	3
	HF-E 3/414 TL5 II	9137130413	3
	HF-S 3/414 TL5 II	9137130330	3
	HF-R 3/414 TL5 220-240	9137001423	3
	HF-R TD 314 TL5 EII	9137006291	3
	HF-Ri TD 3 14/24 TL5 E+	9137006790	3
	HF-P 3/414 TL5 III IDC	9137130339	3
	HF-R 314 TL5 EII	9137006294	3
	HF-P 3/4 14 TL5 EII 220-240	9137006013	3
	EB-Ci 1-2 14-28W	9137130432	3x14
	HF-E 3/414 TL5 II	9137130413	4
	HF-S 3/414 TL5 II	9137130330	4x14
	HF-R 3/414 TL5 220-240	9137001423	4
	HF-P 3/414 TL5 III IDC	9137130339	4
	HF-R 414 TL5 EII	9137006144	4
	HF-P 3/4 14 TL5 EII 220-240	9137006013	4
	HF-Ri TD 4 14/24 TL5 E+	9137006791	4
	HF-Pi 3/4 14/24 TL5/PLL EII	9137006576	3
	HF-Pi 3/4 14/24 TL5/PLL EII	9137006576	4
	HF-P 414 TL5 220-240	9137001562	4
OSRAM	QT-FIT5 3x14, 4x14		3
	QTP5 3x14, 4x14		3
	EZ-T5 3x14/220		3
	QT-FIT5 3x14, 4x14		4
	QTP5 3x14, 4x14		4
	QT-FIT5 1x14-35		1
	QTP5 1x14-35		1
	QT-FIT5 2x14-35		2
	QTP5 2x14-35		2
	Qti 2x28/54		2
	QTi 1x14/24/21/39 GII		1
	Qti DALI 2x14/24 DIM		2
	QTi 2x14/24/21/39 GII		2
	QTi DALI 3x14/24 DIM		3
	QTi 3x14/24 DIM		3
	QTi 4x14/24 DIM		4
	QTi DALI 4x14/24 DIM		4



(1) Do not use in closed luminaires

CorePro LEDtube HF T5 HE - 600 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
	Ballast is not compatible.	

<div><div></div></div>			CorePro LEDtube HF 600mm HE 7.1W 8xx T5	
			Model number / (Short) EOC code: 9290037741 / 8720169 29540700 9290037742 / 8720169 29542100 9290037743 / 8720169 29544500	
			AC (50 Hz) on HF Ballast Compatible	
HELVAR	Ballast type	12nc	Lamps on ballast	*
	EL3/4x14ngn5		3	*
	EL3/4x14ngn5		4	*
	EL1x14-35ngn5		1	
	EL2x14-35ngn5		2	
	EL2x14-35iDim		2	
	EL2x14-35s		2	
TRIDONIC ATCO	PC 1x14 T5 TEC Ip	87500211	1	
	PCA 2x14 T5 BASIC Ip	22185077	2	
	PC 3/4x14 T5 TOP Ip	22185220	3	
	PC 3/4x14 T5 PRO Ip	22185211	3	
	PC 4x14 T5 TEC Ip	87500214	4	
	PC 3/4x14 T5 TOP Ip	22185220	4	**
	PC 3/4x14 T5 PRO Ip	22185211	4	*
	PC 1x14-35 T5 TOP Ip	22185157	1	
	PC 1x14-35 T5 PRO Ip	22185147	1	
	PC 1x14-21W BASIC sI	22176001	1	**
	PC 1/14-21-28-35 T5 PRO Ip	22087725	1	**
	PC 1/14-21-28-35 T5 PRO Ip	22176096	1	
	PC 2x14-28 T5 TOP Ip	22185158	2	
	PC 2x14-35 T5 PRO Ip	22185148	2	*
	PC 2/14-35/49/54 T5 PRO-M Ip	22176186	2	
	PC 1/14-35/49/80 T5 PRO-M Ip	22176184	1	*
	PC 2/14-21/24/39 T5 PRO-M Ip	22176185	2	*
	PCA 2x14/24 T5 ECO Ip	22185095	2	
	PCA 2x14/24 T5 EXCEL one4all Ip	22185104	2	
	PCA 3x14/24 T5 EXCEL one4all Ip	22176209	3	
	PCA 3x14/24 T5 ECO Ip	22176211	3	
	PCA 3x14/24 T5 EXCITE Ip	28000307	3	
	PCA 4x14/24 T5 EXCEL one4all Ip	22176210	4	
	PCA 4x14/24 T5 ECO Ip	22176212	4	
	PCA 4x14/24 T5 EXCITE Ip	28000308	4	
VOSSLOH-SCHWABE	ELXc 114.238	183122	1	
	ELXc 214.240	183124	2	
	ELXc 414.227	183109	3	**
	ELXc 414.868	188438	3	
	ELXc 414.227	183109	4	**
	ELXc 414.242	183126	4	
	ELXc 414.868	188438	4	
	ELXc 135.220	188921	1	**
	ELXc 228.229	183111	1	**
	ELXc 228.229	183111	2	*
	ELXc 135.231	183113	1	*
	ELXc 135.856	188093	1	**
	ELXc 228.229	183111	2	**
	ELXc 235.857	188094	2	**
	ELXc 235.221	188922	2	**
	ELXd 235.735	183059	2	*
	ELXc 139.632	188945	1	
	ELXd 124.600	188329	1	**
	ELXd 124.607	188336	1	**
	ELXc 239.635	188948	2	*
	ELXd 224.601	188330	2	**
	ELXd 224.608	188337	2	*
	ELXd 324.623	188597	3	
	ELXd 324.626	188597	3	*
	ELXd 424.624	188598	4	**
	ELXd 424.628	188598	4	**

(1) Do not use in closed luminaires

Q3-Q4 2025

CorePro LEDtube HF T5 HE - 600 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
	Ballast is not compatible.	

<div><div></div><div></div></div>			CorePro LEDtube HF 600mm HE 7.1W 8xx T5
			Model number / (Short) EOC code: 9290037741 / 8720169 29540700 9290037742 / 8720169 29542100 9290037743 / 8720169 29544500
			AC (50 Hz) on HF Ballast Compatible
BAG-HUECO	Ballast type	12nc	Lamps on ballast
	BCS14.3-4FR-01/220-240	10052868	3
	BCS14.3-4FR-01/220-240	10052868	4
	BCS35.1FX-11/220-240	10077579	1
	BCS35.2FX-11/220-240	10077580	2
	MLS54.2F-01/220-240	166412	2
	MLD39.1FR-11/220-240/DALI	10097811	1
	MLS39.1-2FR-11/220-240	10092026	1
	MLS39.1-2FR-11/220-240	10092026	2
	MLD39.2FR-11/220-240/DALI	10092117	2
	MLD14/24.3FR-04/220-240/DALI	10105150	3
	MLS14/24.3-4FR-11/220-240	10095345	3
	MLS14/24.3-4FR-11/220-240	10095345	4
	MLS80.1F-01/220-240		1
	D35.1-23051E		1
	SCS35.1F-01/220-240		1
SCS14.3-4F-01/220-240		3	
SCS14.3-4F-01/220-240		4	
TCI	BTL 414	137999/54	3
	BTL 414		4
Arlen EFA	BE - 214-35 - T5		2
Others	LYZ-1X14WT5-240		1
	Direct mains		

(1) Do not use in closed luminaires

CorePro LEDtube HF T5 HE - 600mm

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts.

Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube.

Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube



Q3-Q4 2025

CorePro LEDtube HF T5 HE - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
	Ballast is not compatible.	

<div><div></div></div>			CorePro LEDtube HF 1200mm HE 17.1W 8xx T5
			Model number / (Short) EOC code: 9290037744 / 8720169 29546900 9290037745 / 8720169 29548300 9290037746 / 8720169 29550600
			AC (50 Hz) on HF Ballast Compatible
PHILIPS	Ballast type	12nc	Lamps on ballast
	HF-P 128 TL5 220-240	9137001366	1
	EB-C 128 TL5 II	9137130404	1
	EB-C 228 TL5 II	9137130406	2
	HF-S 128-35 TL5 II	9137130332	1
	HF-Pi 1 28/35/49/54 TL5 EII 220-240	9137006241	1
	HF-Ri TD 1 28/35/49/54 TL5 E+	9137006956	1
	HF-Pi 1 28/35/49/80 TL5 EII	9137006525	1
	EB-C 128 TL5	9137131964	1
	EB-Ci 1-2 14-28W	9137130432	1
	HF-P 1 14-35 TL5 HE III IDC 4CIC	9137130310	1
	HF-P 1 14-35 TL5 HE III IDC C2E	9137130310	1
	HF-R Es 114-35 TL5	9137006616	1
	HF-R 114-35 TL5 EII	9137006198	1
	BLUE 128 LH TL5	9137004199	1
	HF-Pi 1 28/35/49/80 TL5 EII 220-240	9137006525	1
	HF-S 114-35 TL5 II	9137130429	1
	HF-S 1 14-35 TL5 HE II	9137130420	1
	HF-P 1 14-35 TL5 HE EII 220-240	9137006129	1
	HF-Ri TD 1 28-35-49-54 TL5 E+	9137006560	1
	EB-C 128 TL5 II	9137130404	2
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2
	HF-Pi 2 28/35/49/80 TL5 EII	9137006526	2
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006958	2
	EB-C 228 TL5	9137131971	2
	EB-Ci 1-2 14-28W	9137130432	2
	HF-P 2 14-35 TL5 HE III IDC	9137130311	2
	HF-S 2 14-35 TL5 HE II	9137130421	2
	HF-R Es 214-35 TL5	9137006617	2
	HF-R T 228 TL5 220-240	9137001863	2
	HF-Pi 2 14/21/24/39 TL5 EII 220-240	9137006242	2
	HF-Pi 2 28/35/49/80 TL5 EII 220-240	9137006526	2
	HF-R 214-35 TL5 EII	9137006195	2
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006561	2
	HF-S 214-28 TL5 II	9137130430	2
OSRAM	QT-FIT5 1x14-35		1
	QTP5 1x14-35		1
	QT-FIT5 2x14-35		2
	QTP5 2x14-35		2
	Qti 1x28/54/35/49 GII		1
	Qti 1x28/54 DIM		1
	Qti 2x28/54/35/49 GII		2
	Qti 2x28/54 DIM		2
	Qti DALI 2x28/54 DIM		2
	Qti 2x28/54		2
HELVAR	EL1x14-35ngn5		1
	EL2x14-35ngn5		2
	EL2x14-35iDim		2
	EL2x14-35s		2
TRIDONIC ATCO	PCA 1x28 T5 BASIC Ip	22185086	1
	PCA 2x28 T5 BASIC Ip	22185087	2
	PC 1x14-35 T5 TOP Ip	22185157	1
	PC 1x14-35 T5 PRO Ip	22185147	1
	PC 1/14-21-28-35 T5 PRO Ip	22087725	1
	PC 1/14-21-28-35 T5 PRO Ip	22176096	1
	PC 2x14-28 T5 TOP Ip	22185158	2
	PC 2x14-35 T5 PRO Ip	22185148	2
	PCA 1x28/54 T5 ECO Ip	22185099	1
	PCA 1x28/54 T5 EXCEL one4all Ip	22185108	1
	PCA 2x28/54 T5 ECO Ip	22185100	2
	PCA 2x28/54 T5 EXCEL one4all Ip	22185109	2
	PC 2/14-35/49/54 T5 PRO-M Ip	22176186	2
	PC 1/14-35/49/80 T5 PRO-M Ip	22176184	1

(1) Do not use in closed luminaires

Q3-Q4 2025

CorePro LEDtube HF T5 HE - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
	Ballast is not compatible.	

<div><div></div><div></div></div>			CorePro LEDtube HF 1200mm HE 17.1W 8xx T5	
			Model number / (Short) EOC code: 9290037744 / 8720169 29546900 9290037745 / 8720169 29548300 9290037746 / 8720169 29550600	
			AC (50 Hz) on HF Ballast Compatible	
VOSSLOH-SCHWABE	Ballast type	12nc	Lamps on ballast	*
	ELXc 328.230	183112	3	
	ELXc 135.220	188921	1	
	ELXc 228.229	183111	1	
	ELXc 228.229	183111	2	
	ELXc 135.231	183113	1	
	ELXc 135.856	188093	1	
	ELXc 228.229	183111	2	
	ELXc 235.857	188094	2	*
	ELXc 235.221	188922	2	
	ELXd 235.735	183059	2	
	ELXc 154.633	188946	1	*
	ELXd 154.611	188340	1	
	ELXd 154.603	188332	1	*(1)
	ELXc 254.636	188949	2	**
	ELXd 254.612	188341	2	*(1)
	ELXd 254.604	188333	2	*(1)
BAG-HUECO	BCS35.1FX-11/220-240	10077579	1	*
	BCS35.2FX-11/220-240	10077580	2	*
	MLS54.2F-01/220-240	166412	2	
	MLD54.2FR-11/220-240/DALI	10092121	2	
	MLD54.1FR-11/220-240/DALI	10097815	1	
	MLS80.1/54.2FR-11/220-240	10071609	1	
	MLS80.1/54.2FR-11/220-240	10071609	2	
	MLS80.1FR-11/220-240	10071608	1	
	D35.1-23051E		1	
	SCS35.1F-01/220-240		1	
	MLS80.1F-01/220-240		1	
ELT	BE - 214-35 - T5 2		2	
GELEC	CDZ128LY10		1	**
THORN	GM128		1	
Others	Direct mains			

(1) Do not use in closed luminaires

CorePro LEDtube HF T5 HE - 1200mm

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts.

Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube.

Please also check and follow the instructions of HF ballast manufacturers for installation instructions.


Always check the latest update of the compatibility list on www.philips.com/ledtube

CorePro LEDtube HF T5 HE - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
	Ballast is not compatible.	



			CorePro LEDtube HF 1500mm HE 20.5W 8xx T5
			Model number / (Short) EOC code: 9290037747 / 8720169 29552000 9290037748 / 8720169 29554400 9290037749 / 8720169 29556800
			AC (50 Hz) on HF Ballast Compatible
PHILIPS	Ballast type	12nc	Lamps on ballast
	HF-S 128-35 TL5 II	9137130332	1
	HF-Pi 1 28/35/49/54 TL5 EII 220-240	9137006241	1
	HF-Ri TD 1 28/35/49/54 TL5 E+	9137006956	1
	HF-Ri TD 1 35/49/80 TL5 E+	9137006957	1
	HF-Ri TD 1 35/49/80 TL5 E+	9137006957	1
	HF-Pi 1 28/35/49/80 TL5 EII	9137006525	1
	HF-P 1 14-35 TL5 HE III IDC 4CIC	9137130310	1
	HF-P 1 14-35 TL5 HE III IDC C2E	9137130310	1
	HF-R Es 114-35 TL5	9137006616	1
	HF-R 114-35 TL5 EII	9137006198	1
	HF-P 135 TL5 220-240	9137001367	1
	HF-P 135 TL5 220-240	9137001726	1
	HF-Pi 1 28/35/49/80 TL5 EII 220-240	9137006525	1
	HF-S 114-35 TL5 II	9137130429	1
	HF-S 1 14-35 TL5 HE II	9137130420	1
	HF-P 1 14-35 TL5 HE EII 220-240	9137006129	1
	HF-Ri TD 1 28-35-49-54 TL5 E+	9137006560	1
	HF-P 235 TL5 220-240	9137001212	2
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2
	HF-Pi 2 28/35/49/54 TL5 EII 220-240	9137006243	2
	HF-Pi 2 28/35/49/80 TL5 EII	9137006526	2
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006958	2
	HF-P 2 14-35 TL5 HE III IDC	9137130311	2
	HF-S 2 14-35 TL5 HE II	9137130421	2
	HF-R Es 214-35 TL5	9137006617	2
	HF-Pi 2 14/21/24/39 TL5 EII 220-240	9137006242	2
	HF-Pi 2 28/35/49/80 TL5 EII 220-240	9137006526	2
	HF-R 214-35 TL5 EII	9137006195	2
	HF-Ri TD 2 28/35/49/54 TL5 E+	9137006561	2
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006709	2
	HF-Ri TD 1 14/21/24/39 TL5 E+	913700608	1
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006984	2
	HF-Pi 2 14/21/24/39 TL5 EII 220-240	9137006242	2
OSRAM	QT-FIT5 1x14-35		1
	QTP5 1x14-35		1
	QT-FIT5 2x14-35		2
	QTP5 2x14-35		2
	Qti 1x35/49/80 GII		1
	Qti 1x35/49/80		1
	Qti 1x28/54/35/49 GII		1
	Qti 1x35/49/80 DIM		1
	Qti DALI 1x35/49/80 DIM		1
	Qti 2x35/49/80 GII		2
	Qti 2x28/54/35/49 GII		2
	Qti 2x35/49 DIM		2
	Qti 2x35/49/80 DIM		2
	Qti DALI 2x35/49/80 DIM		2
HELVAR	EL1x14-35ngn5		1
	EL2x14-35ngn5		2
	EL2x14-35s		2
TRIDONIC ATCO	PCA 1x35 T5 BASIC Ip	22185080	1
	PC 2x35 T5 TOP Ip (28000047)	28000047	2
	PC 2x35 T5 TOP Ip (87500292)	87500292	2
	PCA 2x35 T5 BASIC Ip	22185081	2
	PC 1x14-35 T5 TOP Ip	22185157	1
	PC 1x14-35 T5 PRO Ip	22185147	1
	PC 1/14-21-28-35 T5 PRO Ip	22087725	1
	PC 1/14-21-28-35 T5 PRO Ip	22176096	1
	PCA 1x35/49/80 T5 ECO Ip	22185096	1
	PCA 1x35/49/80 T5 EXCEL one4all Ip	22185105	1
	PCA 1x35/49/80 T5 EXCEL one4all Ip	22176172	1
	PCA 2x35/49 T5 EXCEL one4all Ip	22185106	2
	PCA 2x35/49 T5 ECO Ip	22185097	2
	PC 2/14-35/49/54 T5 PRO-M Ip	22176186	2
	PC 1/14-35/49/80 T5 PRO-M Ip	22176184	1

Q3-Q4 2025

CorePro LEDtube HF T5 HE - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
	Ballast is not compatible.	

<div><div></div><div></div></div>			CorePro LEDtube HF 1500mm HE 20.5W 8xx T5
			Model number / (Short) EOC code: 9290037747 / 8720169 29552000 9290037748 / 8720169 29554400 9290037749 / 8720169 29556800
			AC (50 Hz) on HF Ballast Compatible
VOSSLOH-SCHWABE	Ballast type	12nc	Lamps on ballast
	ELXc 235.232	183114	2
	ELXc 135.220	188921	1
	ELXc 135.231	183113	1
	ELXc 135.856	188093	1
	ELXc 235.857	188094	2
	ELXc 235.221	188922	2
	ELXd 235.735	183059	2
	ELXc 154.633	188946	1
	ELXc 180.634	188947	1
	ELXd 180.605	188334	1
	ELXc 254.636	188949	2
	ELXc 280.637	188950	2
	ELXd 249.606	188335	2
	ELXd 280.630	188604	2
BAG-HUECO	BCS35.1FX-11/220-240	10077579	1
	BCS35.2FX-11/220-240	10077580	2
	MLD54.1FR-11/220-240/DALI	10097815	1
	MLS80.1/54.2FR-11/220-240	10071609	1
	MLS80.1FR-11/220-240	10071608	1
	MLD80.1FR-11/220-240/DALI	10097820	1
	MLD54.2FR-11/220-240/DALI	10092121	2
	MLD80.2FR-11/220-240/DALI	10101905	2
	MLS54.2F-01/220-240	166412	2
	MLS80.1/54.2FR-11/220-240	10071609	2
	MLS39.1-2FR-11/220-240	10092026	1
	MLS39.1-2FR-11/220-240	10092026	2
	MLS80.1F-01/220-240		1
	D35.1-23051E		1
	SCS35.1F-01/220-240		1
TCI	MLS80.1F-01/220-240		1
ARLEN EFA	BE - 214-35 - T5		2
	LYZ-1X14WT5-240		1
	LYZ-1X35WT5-240		1
	LYZ-1X35WT5-110C		1
Others	Direct mains		

CorePro LEDtube HF T5 HE - 1500mm

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T5 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T5 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T5 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts.

Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube.

Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube

MASTER LEDtube HF T8 - 600 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
CF	Ballast is compatible and supports camera friendly performance on commonly used consumer cameras	
	Ballast is not compatible.	
	Ballast LEDtube combination not tested	



	Ballast type	12nc	Lamps on ballast
PHILIPS	HF-P 118 TLD III IDC	9137130312	1
	HF-P 218 TLD III IDC	9137130313	2
	HF-S 118 TLD II	9137130320	1
	HF-S 218 TL-D II 220-240V 50/60Hz	9137130323	2
	HF-S 3/4x18 TLD II	9137130326	3
	HF-S 3/4x18 TLD II	9137130326	4
	HF-Matchbox 1x18 Blue	9137004180 / 9137004179	1
	HF-Matchbox 1x18 RED	9137004234	1
	HF-P 3/4x18 TLD III IDC	9137130314	3
	HF-P 3/4x18 TLD III IDC	9137130314	4
	HF-E 136 TL-D II 220-240V 50/60Hz (HF-E 218 TLD)	9137130390	2
	HF-E 418 TL-D II 220-240V 50/60Hz-parl	9137130412	4
	HF-P 118 TLD 220-240	9137001709	1
	HF-P 118/136 TL-D III	9137130315	1
	HF-S 118/136 TL-D II	9137130321	1
	HF-P 218/236 TL-D III	9137130316	2
	HF-S 218/236 TL-D II	9137130324	2
	HF-R 318 TL-D EII	9137006295	3
	HF-R 418 TL-D EII	9137006146	4
	HF-P 118 TLD EII 220-240	9137001910	1
	HF-Pi 1 14/21/24/39 TL5 EII 220-240	9137006240	1
	EB-Ci 1-2 36w/1-4 18W	9137130431	1
	EB-Ci 1-2 36w/1-4 18W	9137130431	2
	EB-Ci 1-2 36w/1-4 18W	9137130431	3
	EB-Ci 1-2 36w/1-4 18W	9137130431	4
OSRAM	QTP8 1x18		1
	QTP8 2x18		2
	QT-FIT8 1x18		1
	QT-FIT8 2x18		2
	QT Fit 5/8 1x18-39		1
	QTP-OPTIMAL 118-		1
	QTP-OPTIMAL 218-		2
	QT Fit 5/8 2x18-39		2
	QT-FIT8 3/4X18		3
	QT-FIT8 3/4X18		4
HELVAR	EL1x18ngn		1
	EL2x18ngn		2
	EL 3/4x18ngn		4
	EL 3/4x18ngn		3
	EL1x18s		1
	EL 4x18ngn		4
	EL2x18s		2
TRIDONIC ATCO	PC 118 PRO Ip	22185213	1
	PC 218 PRO Ip	22185216	2
	PC 1X18-24W BASIC	22176000	1
	PC 1x18 T8 TOP sI	22185222	1
	PC 3/4X18 TOP Ip	22185219 / 22185228	3
	PC 3/4X18 TOP Ip	22185219 / 22185228	4
	PC 1/14-35/24/39 T5 PRO-M Ip	22176182	1
	PC 2/14-35/24/39 T5 PRO-M Ip	22176185	2
	PC 1x18 T8 TEC	87500113	1
	PC 2x18 T8 TEC	87500114	2

CorePro LEDtube HF 600mm HO 8W 8xx T8
Model number / (Short) EOC code: 9290013931C / 8719514 46640100 9290013932C / 8719514 46642500 9290013933C / 8719514 46644900
AC (50 Hz) on HF Ballast Compatible
CF
CF
CF
CF
*
*
CF
CF
CF
CF
* / CF
CF
CF
CF
CF
* / CF
*
*
* / CF
CF
CF
CF
* / CF
* / CF
*
CF
*
CF
CF
*
CF
CF
CF
*

Q3-Q4 2025


MASTER LEDtube HF T8 - 600 mm

Ballast compatibility


Key

	Ballast is compatible.
*	Ballast is compatible. Light output may differ >10% compared to specifications.
Dim	Ballast is compatible and conditional released for dimming
CF	Ballast is compatible and supports camera friendly performance on commonly used consumer cameras
	Ballast is not compatible.
	Ballast LEDtube combination not tested

This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.



Works with
High Frequency ballast (HF)



InstantFit™
HASSLE FREE INSTALLATION

	Ballast type	12nc	Lamps on ballast
VOSSLOH-SCHWABE	ELXc 136.200	188314	1
	ELXc 236.208	188705	2
	ELXc 424.379	188116	3
	ELXc 424.379	188116	4
	ELXc 418.204	188318	3
	ELXc 418.204	188318	4
	ELXc 136.207	188708	1
	BAG-HUECO	BCS18.1FX-11/220-240	1007 7588
BCS18.2FX-11/220-240		1007 7589	2
BCS18.3-4LR-01/220-240 3lamp		1005 0999	3
BCS18.3-4LR-01/220-240 4lamp		1005 0999	4
Others	Direct mains		
	Electro Magnetic Ballast		

CorePro LEDtube HF 600mm
HO 8W 8xx T8

Model number / (Short) EOC code:
9290013931C / 8719514**46640100**
9290013932C / 8719514**46642500**
9290013933C / 8719514**46644900**

AC (50 Hz) on HF Ballast Compatible

CF

* / CF

CF

CF

CF

CF

CF

* / CF

CF

CF

MASTER LEDtube HF InstantFit T8

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T8 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T8 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T8 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.



Dimming a LEDtube: Philips 600mm MASTER LEDtubes InstantFit T8 are not developed for dimming therefore the performance cannot be guaranteed in a dimming application. In case of usage of a non-dimmable product in a dimmable application, warranty does not apply.

MASTER LEDtube HF T8 - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
CF	Ballast is compatible and supports camera friendly performance on commonly used consumer cameras	
	Ballast is not compatible.	
	Ballast LEDtube combination not tested	



<div><div><div>Works with High Frequency ballast (HF)</div></div><div><div>InstantFit™ HASSLE FREE INSTALLATION</div></div></div>				MAS LEDtube HF 1200mm 14W 833 T8 FOOD	MAS LEDtube HF 1200mm HO 14W 8xx T8	MAS LEDtube HF 1200mm UO 16W 8xx T8
				Model number / (Short) EOC code: 9290024794 / 8719514 29616900	Model number / (Short) EOC code: 9290035534 / 8719514 46688300 9290035535 / 8719514 46684500 9290035536 / 8719514 46686900	Model number / (Short) EOC code: 9290035540 / 8719514 46700200 9290035541 / 8719514 46696800 9290035542 / 8719514 46698200
				AC (50 Hz) on HF Ballast Compatible	AC (50 Hz) on HF Ballast Compatible	AC (50 Hz) on HF Ballast Compatible
PHILIPS	Ballast type	10nc / Ref. no.	Lamps on ballast	*	*	*
	HF-B 136 TLD 220-240	9137001122	1	* / CF	* / CF	* / CF
	HF-B 136 TLD EII 220-240	9137001926	1	*	*	*
	HF-B 236 TL-D 220-240	9137001124	2	*	*	*
	HF-B 236 TLD EII 220-240	9137001928	2			
	HF-E 136 TL-D II	9137130410	1			
	HF-E 236 TL-D	9137130391	2			
	HF-E 236 TL-D II	9137130411	2			
	HF-K 136 TLD 220-240	9137001477	1	* / CF	* / CF	* / CF
	HF-P 136 TL-D III IDC	9137130315	1	CF	CF	CF
	HF-P 236 TL-D III IDC	9137130316	2			
	HF-P 336 TL-D III IDC	9137130317	3	* / CF	* / CF	* / CF
	HF-P Xt 136 TLD EII 220-240	9137006177	1	* / CF	* / CF	* / CF
	HF-P XT 236 TLD EII 220-240	9137006178	2	* / CF	* / CF	* / CF
	HF-P 136 TLD EII 220-240	9137001911	1	* / CF	* / CF	* / CF
	HF-P 236 TLD 230-240	9137001112	2			*
	HF-Pi 1 14/21/24/39 TL5 EII 220-240	9137006240	1	CF	CF	CF
	HF-R 136 TL-D EII	9137006092	1	Dim / CF	Dim / CF	Dim / CF
	HF-R 236 TL-D EII	9137006093	2			
	HF-R 136 TL-D 220-240V 50/60Hz	9137001117	1			
	HF-S 136 TL-D II	9137130321	1	* / CF	* / CF	* / CF
	HF-S 236 TL-D II	9137130324	2			
	HF-S 336 TL-D II	9137130327	3	* / CF	* / CF	* / CF
	HF-P 118/136 TL-D III	9137130315	1	CF	CF	CF
	HF-S 118/136 TL-D II	9137130321	1	* / CF	* / CF	CF
	HF-P 218/236 TL-D III	9137130316	2			
	HF-S 218/236 TL-D II	9137130324	2			
	EB-C 136 TL-D 220-240	9137131992	1			
	EB-Ci 1-2 36w/1-4 18W	9137130431	1	CF	CF	CF
	EB-Ci 1-2 36w/1-4 18W	9137130431	2			
OSRAM	QT-FIT8 1x36		1	* / CF	* / CF	* / CF
	QT-FIT8 2x36		2	* / CF	* / CF	* / CF
	QTP8 1x36		1	* / CF	* / CF	* / CF
	QTP8 2x36		2	*	*	*
	QTP-OPTIMAL 1x18-40		1	CF	CF	CF
	QTP-OPTIMAL 2x18-40		2	* / CF	* / CF	* / CF
	QTP-DL 1x36-40		1	*	*	*
	QT-FIT 5/8 1x18-39		1	CF	CF	CF
	QT-FIT 5/8 2x18-39		2	* / CF	* / CF	* / CF
HELVAR	EL1x36/40/18S		1	* / CF	* / CF	* / CF
	EL1x36HF		1			
	EL1x36ngn		1	* / CF	* / CF	* / CF
	EL2x36/40s		2	* / CF	* / CF	* / CF
	EL2x36ngn		2			
TRIDONIC ATCO	PC 1/36 T8 INDUSTRY	86458035	1			
	PC 1/36 T8 PRO	22176217	1			
	PC 1x36 T8 PRO Ip	22185214	1	CF	CF	CF
	PC2/36 T8 INDUSTRY	86458036	2	* / CF	* / CF	* / CF
	PC2x36 T8 PRO sI	22185217	2	* / CF	* / CF	* / CF
	PC 2x36 T8 TOP sI	22185226	2	* / CF	* / CF	* / CF
	PC 1x36 T8 TOP sI	22185223	1	CF	CF	CF
	PC1/36 T8 PRO sc	89800008	1			
	PC 1/36 T8 PRO	22176108	1			
	PC 3/36 T8 PRO	22176231	3	*	*	*
	PC 1/36 TCL PRO	87500507	1	* / CF	* / CF	* / CF

MASTER LEDtube HF T8 - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
CF	Ballast is compatible and supports camera friendly performance on commonly used consumer cameras	
	Ballast is not compatible.	
	Ballast LEDtube combination not tested	

<div><div> Works with High Frequency ballast (HF)</div><div> HASSLE FREE INSTALLATION</div></div>				MAS LEDtube HF 1200mm 14W 833 T8 FOOD	MAS LEDtube HF 1200mm HO 14W 8xx T8	MAS LEDtube HF 1200mm UO 16W 8xx T8
				Model number / (Short) EOC code: 9290024794 / 8719514 29616900	Model number / (Short) EOC code: 9290035534 / 8719514 446688300 9290035535 / 8719514 446684500 9290035536 / 8719514 446686900	Model number / (Short) EOC code: 9290035540 / 8719514 446700200 9290035541 / 8719514 446696800 9290035542 / 8719514 446698200
				AC (50 Hz) on HF Ballast Compatible	AC (50 Hz) on HF Ballast Compatible	AC (50 Hz) on HF Ballast Compatible
VOSS- LOH-SCHWABE	Ballast type	10nc / Ref. no.	Lamps on ballast	* / CF	* / CF	* / CF
	ELXc 136.207	188708	1	* / CF	* / CF	* / CF
	ELXc 236.202	188316	2	* / CF	* / CF	* / CF
	ELXc 236.208	188705	2	CF	CF	CF
	ELXe 238.527	188137	2	CF	CF	CF
BAG-HUECO	ELXe 238.527	188137	1	CF	CF	CF
	BCS36.1FX-11/220-240	10077590	1	CF	CF	CF
	BCS36.2FX-11/220-240	10077591	2			
	D36.2-23021 E	166132	2	* / CF	* / CF	* / CF
	D 58.1-23021 E	166072	1			
Trilux	ECS36.2SR-01/220-240	167032	2			
	D36.2-23021 E		2	*	*	*
	D58.1-23021E		1			
Others	DD58.1-23031E		1			
	EM ballast					
				Direct Mains		

MASTER LEDtube HF InstantFit T8

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T8 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T8 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T8 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Ballast types indicated in this list with DIM are conditional released by Signify to offer dimming functionality. Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp. All other Philips LED tubes are not developed for dimming therefore the performance cannot be guaranteed in a dimming application. In case of usage of a non dimmable product in a dimmable application, warranty does not apply.

Q3-Q4 2025

MASTER LEDtube HF T8 - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
CF	Ballast is compatible and supports camera friendly performance on commonly used consumer cameras	
	Ballast is not compatible.	
	Ballast LEDtube combination not tested	



	Ballast type	10nc / Ref. no.	Lamps on ballast
PHILIPS	EI 158 TL-D 220-240	9137006075	1
	HF-B 158 TLD 220-240	9137001123	1
	HF-B 158 TLD EII 220-240	9137001927	1
	HF-B 258 TLD 220-240	9137001125	2
	HF-B 258 TL-D EII 220-240	9137001929	2
	HF-E 158 TL-D	9137130389	1
	HF-E 1/2 58 TL-D II	9137130409	2
	HF-E 1/2 58 TL-D II	9137130409	1
	HF-P 154/155 TL5 HO/PL-L III IDC	9137130282	1
	HF-P 158 TLD 230-240	9137001111	1
	HF-P 158 TLD EII 220-240	9137001912	1
	HF-P 158 TL-D III IDC	9137130318	1
	HF-P 258 TLD EII 220-240	9137001916	2
	HF-P 258 TL-D III IDC	9137130319	2
	HF-P Xt 158 TLD EII 220-240	9137006179	1
	HF-P Xt 258 TL-D EII 220-240	9137006180	2
	HF-P 158 TLD 220-240	9137001185	1
	HF-P 258 TLD 230-240	9137001110	2
	HF-R 258 TLD 220-240	9137001119	2
	HF-R 158 TLD EII	9137006094	1
	HF-R 258 TLD EII	9137006095	2
	HF-RiTD 1 28/35/49/54TL5	9137006956	1
	HF-RiTD 2 28/35/49/54TL5	9137006958	2
	HF-S 158 (Designed for Philips Luminares)		1
	HF-S 158 TL-D II	9137130322	1
	HF-S 258 TL-D II	9137130325	2
	HF-S 258 TL-D II HT	9137006899	2
	HF-S 158 TLD 220-240	9137006319	1
	EB-P 258 TLD ICC 220-240	9137130210	2
	HF-P 258 TLD 220-240	9137001206	2
HF-S 258 TLD 220-240	9137006452	2	
OSRAM	QT Deluxe HF 1x58 230-240 DIM		1
	QT Deluxe HF 2x58 230-240 Dim		2
	QT-FIT8 1x58-70		1
	QT-FIT8 2x58-70		2
	QTP8 1x58		1
	QTP8 2x58		2
	QTP 2x58/230-240		2
	QTP 1x58/230-240		1
	QTP-OPTIMAL 1x54-58		1
	QTP-OPTIMAL 2x54-58		2
	QT 1X58 DIM		1
	QT-FIT 5/8 1x54-58		1
	QT-FIT 5/8 2x54-58		2
QT-FIT8 2x58		2	
HELVAR	EL1x58ngn		1
	EL1x58s		1
	EL2x58es		2
	EL2x58HF		2
	EL2x58ngn		2
	EL2x58s		2
TRIDONIC ATCO	PC 1/58 T8 INDUSTRY	86458037	1
	PC 1/58 T8 PRO	22176094	1
	PC 1/58 T8 PRO	22176007	1
	PC 1x58 T8 PRO Ip	22185215	1
	PC 2/58 T8 INDUSTRY	86458038	2
	PC 2x58 E011		2
	PC 2x58 E011 IDC	22083174	2
	PC 2x58 T8 PRO sI	22185218	2
	PC 1x58 T8 TOP sI	22185224	1
	PC 2x58 T8 TOP sI	22185227	2
	PCA 1/58 excel one4all	22085286	1
	PCA 2x58 EXCEL One4all Ip	28 000 040	2

[illegible]

MASTER LEDtube HF T8 - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
CF	Ballast is compatible and supports camera friendly performance on commonly used consumer cameras	
	Ballast is not compatible.	
	Ballast LEDtube combination not tested	

<div><div></div><div></div></div>				MAS LEDtube HF 1500mm HO 20W 8xx T8	MAS LEDtube HF 1500mm UO 24W 8xx T8
				Model number / (Short) EOC code: 9290035537 / 8719514 46694400 9290035538 / 8719514 46690600 9290035539 / 8719514 46692000	Model number / (Short) EOC code: 9290035543 / 8719514 46706400 9290035544 / 8719514 46702600 9290035545 / 8719514 46704000
				AC (50 Hz) on HF Ballast Compatible	AC (50 Hz) on HF Ballast Compatible
VOSSLOH-SCHWABE	Ballast type	10nc / Ref. no.	Lamps on ballast	CF	CF
	ELXc 158.201	188315	1	CF	CF
	ELXc 158.209	188706	1	CF	CF
	ELXc 158.218	188870	1	CF	CF
	ELXc 258.203	188317	2	CF	CF
	ELXc 258.210	188707	2	* / CF	* / CF
	ELXc 258.219	188871	2	* / CF	* / CF
	ELXe 258.222	188130	2	CF	CF
	ELXe 258.222	188130	1	CF	CF
	ELXe 158.524	188024	1	CF	CF
BAG-HUECO	BCD58.1F-01/220-240/1-10V	10097145	1		
	BCS58.1FX-11/220-240	10077592	1	CF	CF
	BCS58.2FX-11/220-240	10077593	2		
	BCS58.2SX-01/220-240	10051003	2		
	BCS58.1SR-01/220-240	10051002	1	* / CF	* / CF
	D 58.1-23021 E	166072	1		
	D 58.2-23021 E	166082	2		
	SCS58.2SR-11/220-240	166272	2		
Trilux	D58.1-23021E 1		1		
	DD58.1-23031E		1		
May + Christie	MCU 158		1		
	MCU 258		2		
Others	Direct mains				
	Electro Magnetic Ballast				

MASTER LEDtube HF InstantFit T8

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T8 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T8 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtubes InstantFit T8 range is designed to work on HF ballasts only. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Ballast types indicated in this list with DIM are conditional released by Signify to offer dimming functionality. Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp. All other Philips LED tubes are not developed for dimming therefore the performance cannot be guaranteed in a dimming application. In case of usage of a non dimmable product in a dimmable application, warranty does not apply.

MASTER Value LEDtube Universal T8 - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	




	Ballast type	10nc / Ref. no.	Lamps on ballast	
PHILIPS	HF-B 136 TLD 220-240	9137001122	1	
	HF-B 136 TLD EII 220-240	9137001926	1	
	HF-B 236 TL-D 220-240	9137001124	2	
	HF-B 236 TLD EII 220-240	9137001928	2	*
	HF-E 136 TL-D II	9137130410	1	
	HF-E 236 TL-D	9137130391	2	
	HF-E 236 TL-D II	9137130411	2	
	HF-K 136 TLD 220-240	9137001477	1	
	HF-P 136 TL-D III IDC	9137130315	1	*
	HF-P 236 TL-D III IDC	9137130316	2	*
	HF-P 336 TL-D III IDC	9137130317	3	**
	HF-P Xt 136 TLD EII 220-240	9137006177	1	
	HF-P XT 236 TLD EII 220-240	9137006178	2	
	HF-P 136 TLD EII 220-240	9137001911	1	
	HF-P 236 TLD 230-240	9137001112	2	
	HF-Pi 1 14/21/24/39 TL5 EII 220-240	9137006240	1	*
	HF-R 136 TL-D EII	9137006092	1	
	HF-R 236 TL-D EII	9137006093	2	
	HF-R 136 TL-D 220-240V 50/60Hz	9137001117	1	
	HF-Ri TD 1 14/21/24/39TL5 E+	9137006983	1	
	HF-S 136 TL-D II	9137130321	1	*
	HF-S 236 TL-D II	9137130324	2	
	HF-S 336 TL-D II	9137130327	3	**
	HF-P 118/136 TL-D III	9137130315	1	*
	HF-S 118/136 TL-D II	9137130321	1	
	HF-P 218/236 TL-D III	9137130316	2	
	HF-S 218/236 TL-D II	9137130324	2	*
	HF-P 136 TLD 220-240	9137001727	1	
	HF-P 138 TLD 220-240	9137001220	1	
	HF-P 236 TLD 220-240	9137001187	2	
	EB-C 136 TL-D 220-240	9137131992	1	
	HF-Performer 136 TL-D 220-240V 50/60Hz	9137001184	1	
	EB-S 236 TL-D 220-230	9137130216	2	
	EL-B 236 TLD 220-240	444100085821	2	
	EB-Ci 1-2 36w/1-4 18W	9137130431	2	*
	EB-Ci 1-2 36w/1-4 18W	9137130431	1	
OSRAM	QT-FIT8 1x36		1	
	QT-FIT8 2x36		2	*
	QTP8 1x36		1	*
	QTP8 2x36		2	
	QTP-OPTIMAL 1x18-40		1	
	QTP-OPTIMAL 2x18-40		2	**
	QT-FIT 5/8 2x18-39		2	*
	QTP-DL 1x36-40		1	
	QT-FIT 5/8 1x18-39		1	
	QTP-DL 2x36-40		2	*
HELVAR	EL1x36/40/18S		1	
	EL1x36HF		1	
	EL1x36ngn		1	*
	EL2x36/40s		2	*
	EL2x36ngn		2	**
	EL 1X36sc			
	EL 2X36sc			
TRIDONIC ATCO	PC 1/36 T8 INDUSTRY	86458035	1	**
	PC 1/36 T8 PRO	22176217	1	**
	PC 1x36 T8 PRO Ip	22185214	1	*
	PC2/36 T8 INDUSTRY	86458036	2	
	PC2x36 T8 PRO sI	22185217	2	
	PC 2x36 T8 TOP sI	22185226	2	
	PC 1x36 T8 TOP sI	22185223	1	
	PC1/36 T8 PRO sc	89800008	1	
	PC 1/36 T8 PRO	22176108	1	
	PC 3/36 T8 PRO	22176231	3	
	PC 1/36 TCL PRO	87500507	1	*
	PC 2/36 TCL PRO	87500518	2	*

MASTER Value LEDtube Universal T8 - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

				MAS LEDtube VLE UN 1200mm UO 15.5W 8xx T8
				Model number / (Short) EOC code: 9290029970B / 87195143 1668300 9290029971B / 87195143 1670600 9290029972B / 87195143 1672000
				AC (50 Hz) on HF Ballast Compatible
VOSSLOH-SCHWABE	Ballast type	10nc / Ref. no.	Lamps on ballast	*
	ELXc 136.207	188708	1	*
	ELXc 236.202	188316	2	**
	ELXc 236.208	188705	2	
	ELXe 238.527	188137	2	
	ELXe 238.527	188137	1	
BAG-HUECO	ELXd 136.852	188084	1	
	BCS36.1FX-11/220-240	10077590	1	
	BCS36.2FX-11/220-240	10077591	2	*
	D36.2-23021 E	166132	2	
	D 58.1-23021 E	166072	1	*
Trilux	ECS36.2SR-01/220-240	167032	2	
	D36.2-23021 E	98147	2	
	D58.1-23021E		1	
SIEMENS	DD58.1-23031E		1	
	5LZ 3211-1N		1	**
TCI	BTL8 136		1	
Others	EM ballast		1	
	Direct Mains		1	

MASTER Value LEDtube Universal

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T8 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T8 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtube InstantFit range is designed to work on HF ballasts only. For EM ballasts or direct mains connection, please contact a Signify sales representative for more information on our EM/Mains compatible range. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Ballast types indicated in this list with DIM are conditional released by Signify to offer dimming functionality. Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp. All other Philips LED tubes are not developed for dimming therefore the performance cannot be guaranteed in a dimming application. In case of usage of a non dimmable product in a dimmable application, warranty does not apply.

MASTER Value LEDtube Universal T8 - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	




	Ballast type	10nc / Ref. no.	Lamps on ballast	MAS LEDtube VLE UN 1500mm UO 23W 8xx T8
PHILIPS	HF-B 158 TLD 220-240	9137001123	1	Model number / (Short) EOC code: 9290029973B / 871951431674400 9290029974B / 871951431676800 9290029975B / 871951431678200
	HF-B 158 TLD EII 220-240	9137001927	1	AC (50 Hz) on HF Ballast Compatible
	HF-B 258 TLD 220-240	9137001125	2	
	HF-B 258 TL-D EII 220-240	9137001929	2	
	HF-E 158 TL-D	9137130389	1	
	HF-E 1/2 58 TL-D II	9137130409	2	
	HF-E 1/2 58 TL-D II	9137130409	1	*
	HF-P 154/155 TL5 HO/PL-L III IDC	9137130282	1	
	HF-P 158 TLD EII 220-240	9137001912	1	
	HF-P 158 TL-D III IDC	9137130318	1	*
	HF-P 258 TLD EII 220-240	9137001916	2	
	HF-P 258 TL-D III IDC	9137130319	2	
	HF-P Xt 158 TLD EII 220-240	9137006179	1	
	HF-P Xt 258 TL-D EII 220-240	9137006180	2	
	HF-P 158 TLD 220-240	9137001185	1	
	HF-P 258 TLD 230-240	9137001110	2	
	HF-R 258 TLD 220-240	9137001119	2	
	HF-R 158 TLD EII	9137006094	1	
	HF-R 258 TLD EII	9137006095	2	
	HF-RiTD 1 28/35/49/54TL5 E+	9137006956	1	
	HF-P 158 TLD 230-240	9137001111	1	
	HF-RiTD 2 28/35/49/54TL5 E+	9137006958	2	
	HF-S 158		1	*
	HF-S 158 TL-D II	9137130322	1	*
	HF-S 258 TL-D II	9137130325	2	**
	HF-S 258 TL-D II HT	9137006899	2	
	HF-S 158 TLD 220-240	9137006319	1	
	EB-P 258 TLD ICC 220-240	9137130210	2	
	HF-P 258 TLD 220-240	9137001206	2	
	EI 158 TL-D 220-240	9137006075	1	
	HF-R TD 258 TLD EII 220-240	9137006070	2	
	HF-S 258 TLD 220-240	9137006452	2	
OSRAM	QT Deluxe HF 1x58 230-240 DIM		1	
	QT Deluxe HF 2x58 230-240 Dim		2	
	QT-FIT8 1x58 - 70		1	
	QT-FIT8 2x58 -70		2	
	QTP8 1x58		1	
	QTP8 2x58		2	
	QTP-OPTIMAL 1x54-58		1	
	QTP-OPTIMAL 2x54 -58		2	*
	QT 1X58 DIM		1	
	QT-FIT 5/8 1x54-58		1	*
	QT-FIT 5/8 2x54-58		2	*
	QT-FIT8 2x58		2	
	QTP 1x58/230-240		1	
	QTP 2x58/230-240		2	
HELVAR	EL1x58ngn			
	EL1x58s			*
	EL2x58es			
	EL2x58HF			*
	EL2x58ngn			
	EL2x58s			

MASTER Value LEDtube Universal T8 - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

				MAS LEDtube VLE UN 1500mm UO 23W 8xx T8
				Model number / (Short) EOC code: 9290029973B / 87195143 1674400 9290029974B / 87195143 1676800 9290029975B / 87195143 1678200
				AC (50 Hz) on HF Ballast Compatible
TRIDONIC ATCO	Ballast type	10nc / Ref. no.	Lamps on ballast	
	PC 1/58 T8 INDUSTRY	86458037	1	
	PC 1x58 T8 PRO Ip	22185215	1	
	PC 1/58 T8 PRO	22176094	1	
	PC 2/58 T8 INDUSTRY	86458038	2	
	PC 2x58 E011 IDC	22083174	2	
	PC 2x58 T8 PRO sl	22185218	2	
	PC 1x58 T8 TOP sl	22185224	1	
	PC 2x58 T8 TOP sl	22185227	2	
	PCA 1/58 excel one4all	22085286	1	
	PCA 2x58 EXCEL One4all Ip	28000040	2	
	PC 1x58 T8 TEC	87500150	1	
	PC 1/58 T8 PRO	22176007	1	
	PCA 1x58 T8 EXCEL One4all Ip	28000036	1	
	PCA 1x58 T8 BASIC Ip	28000043	1	
	PCA 1x58 T8 Eco Ip	28000037	1	
	PC 2x58 T8 TEC	87500151	2	
	PCA 2x58 T8 ECO Ip	28000041	2	
VOSSLOH-SCHWABE	ELXc 158.201	188315	1	*
	ELXc 158.209	188706	1	
	ELXc 258.203	188317	2	*
	ELXc 258.210	188707	2	
	ELXc 258.219	188871	2	
	ELXe 258.222	188130	2	
	ELXe 258.222	188130	1	*
	ELXe 158.524	188024	1	
	ELXc 158.218	188870	1	*
BAG-HUECO	BCD58.1F-01/220-240/1-10V	10097145	1	**/Dim
	BCS58.1FX-11/220-240	10077592	1	
	BCS58.2FX-11/220-240	10077593	2	
	BCS58.2SX-01/220-240	10051003	2	
	D 58.1-23021 E	166072	1	
	D 58.2-23021 E	166082	2	
	SCS58.2SR-11/220-240	166272	2	
	BCS58.1SR-01/220-240	10051002	1	*
	SCS58.1S-01/230-240	166352	1	
	ECS58.2SR-01/220-240	167172	2	
Trilux	D58.1-23021E	98432	1	
	DD58.1-23031E	98625	1	
	D58.2-23021E			
May + Christie	MCU 158		1	
	MCU 258		2	
LUDWIG	ELXe 158.250	172762	1	
Others	Direct mains			
	Electro Magnetic Ballast			

MASTER Value LEDtube Universal

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T8 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T8 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtube InstantFit range is designed to work on HF ballasts only. For EM ballasts or direct mains connection, please contact a Signify sales representative for more information on our EM/Mains compatible range. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.


Dimming a LEDtube: Ballast types indicated in this list with DIM are conditional released by Signify to offer dimming functionality. Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp. All other Philips LED tubes are not developed for dimming therefore the performance cannot be guaranteed in a dimming application. In case of usage of a non dimmable product in a dimmable application, warranty does not apply.

CorePro LEDtube Universal T8 - 600 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

				CorePro LEDtube UN 600mm HO 8W 8xx T8
				Model number / (Short) EOC code: 290024198B / 8718699 78277100 9290024199B / 8718699 78279500 9290024200B / 8718699 78281800
				AC (50 Hz) on HF Ballast Compatible
PHILIPS	Ballast type	10nc / Ref. no.	Lamps on ballast	
	HF-P 118 TLD III IDC	9137130312	1	
	HF-P 218 TLD III IDC	9137130313	2	*
	HF-S 118 TLD II	9137130320	1	
	HF-S 218 TL-D II 220-240V 50/60Hz	9137130323	2	
	HF-S 3/4x18 TLD II	9137130326	3	*
	HF-S 3/4x18 TLD II	9137130326	4	
	HF-Matchbox 1x18 Blue	9137004180 / 9137004179	1	
	HF-Matchbox 1x18 RED	9137004234	1	*
	HF-P 3/4x18 TLD III IDC	9137130314	3	
	HF-P 3/4x18 TLD III IDC	9137130314	4	
	HF-S 118/136 TL-D II	9137130321	1	
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006983	1	
	EB-C 118 TLD 220	9137131990	1	
	EB-E 118 TLD 220	9137100604	1	
	HF-R 118 TLD EII	9137006203	1	
	HF-P 118 TLD EII 220-240	9137001910	1	
	HF-Pi 1 14/21/24/39 TL5 EII 220-240	9137006240	1	
	EB-Ci 1-2 36w/1-4 18W	9137130431	1	
	HF-P 218/236 TL-D III	9137130316	2	*
	HF-S 218/236 TL-D II	9137130324	2	
	HF-Ri TD 2 14/21/24/39 TL5 E+	9137006984	2	
	EB-C 218 TLD 220	9137131991	2	
	EB-Ci 1-2 36w/1-4 18W	9137130431	2	
	HF-R 318 TL-D EII	9137006295	3	
	EB-C 318 TLD 220	9137131975	3	
	HF-R 418 TL-D EII	9137006146	4	
	EB-C 418 TLD 220	9137131973	4	
	EB-Ci 1-2 36w/1-4 18W	9137130431	3	
	EB-Ci 1-2 36w/1-4 18W	9137130431	4	*
	HF-P 3/4 18 TLD EII 220-240	9137001919	3	
	HF-P 3/4 18 TLD EII 220-240	9137001919	4	
OSRAM	QTP8 1x18		1	*
	QTP8 2x18		2	**
	QT-FIT8 1x18		1	**
	QT-FIT8 2x18		2	
	QT Fit 5/8 1x18-39		1	
	QTP-OPTIMAL 118-40		1	
	QT Fit 5/8 2x18-39		2	*
	QT-FIT8 3/4X18		3	*
	QT-FIT8 3/4X18		4	*
HELVAR	EL1x18ngn		1	
	EL2x18ngn		2	
	EL 3/4x18ngn		3	*
	EL 3/4x18ngn		4	*
	EL1x18s		1	
	EL 4x18ngn		4	
	EL2x18s		2	
TRIDONIC ATCO	PC 118 PRO Ip	22185213	1	
	PC 218 PRO Ip	22185216	2	
	PC 1X18-24W BASIC	22176000	1	*
	PC 1x18 T8 TOP sI	22185222	1	
	PC 3/4X18 TOP Ip	22185219 / 22185228	3	
	PC 3/4X18 TOP Ip	22185219 / 22185228	4	*
	PC 1/14-35/24/39 T5 PRO-M Ip	22176182	1	
	PC 2/14-35/24/39 T5 PRO-M Ip	22176185	2	
	PC 1x18 T8 TEC	87500113	1	

CorePro LEDtube Universal T8 - 600 mm

Ballast compatibility

Key

	Ballast is compatible.	This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	



	Ballast type	10nc / Ref. no.	Lamps on ballast
VOSSLOH-SCHWABE	ELXc 136.200	188314	1
	ELXc 236.208		2
	ELXc 424.379	188116	3
	ELXc 424.379	188116	4
	ELXc 418.204	188318	3
	ELXc 418.204	188318	4
	ELXc 136.207		1
	ELXc 118.520	188020	1
BAG-HUECO	BCS18.1FX-11/220-240	10077588	1
	BCS18.2FX-11/220-240	10077589	2
	BCS18.3-4LR-01/220-240 3lamp	10050999	3
	BCS18.3-4LR-01/220-240 4lamp	10050999	4
Others	Direct mains		
	Electro Magnetic Ballast		

CorePro LEDtube UN 600mm HO 8W 8xx T8
Model number / (Short) EOC code: 290024198B / 8718699 78277100 9290024199B / 8718699 78279500 9290024200B / 8718699 78281800
AC (50 Hz) on HF Ballast Compatible
*
*
*
**

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T8 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T8 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtube InstantFit range is designed to work on HF ballasts only. For EM ballasts or direct mains connection, please contact a Signify sales representative for more information on our EM/Mains compatible range. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Ballast types indicated in this list with DIM are conditional released by Signify to offer dimming functionality. Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp. All other Philips LED tubes are not developed for dimming therefore the performance cannot be guaranteed in a dimming application. In case of usage of a non dimmable product in a dimmable application, warranty does not apply.

CorePro LEDtube Universal T8 - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	



	Ballast type	10nc / Ref. no.	Lamps on ballast	CorePro LEDtube UN 1200mm HO 18W 8xx T8	CorePro LEDtube UN 1200mm UO 15.5W 8xx T8
				Model number / (Short) EOC code: 9290018692C / 8718696 80166600 9290018693C / 8718696 80168000 9290018694C / 8718696 80170300	Model number / (Short) EOC code: 9290036481 / 8720169 19996500 9290036482 / 8720169 19998900 9290036483 / 8720169 20000500
				AC (50 Hz) on HF Ballast Compatible	AC (50 Hz) on HF Ballast Compatible
PHILIPS	EB-C 136 TL-D 220-240	9137131992	1		
	EB-S 236 TL-D 220-230	9137130216	2		
	HF-B 136 TLD 220-240	9137001122	1		**
	HF-B 136 TLD EII 220-240	9137001926	1		**
	HF-B 236 TL-D 220-240	9137001124	2		**
	HF-B 236 TLD EII 220-240	9137001928	2		*
	HF-E 136 TL-D II	9137130410	1		
	HF-E 236 TL-D	9137130391	2		
	HF-E 236 TL-D II	9137130411	2		
	HF-K 136 TLD 220-240	9137001477	1		*
	HF-P 136 TL-D III IDC	9137130315	1		*
	HF-P 236 TL-D III IDC	9137130316	2		*
	HF-P 336 TL-D III IDC	9137130317	3	*	
	HF-P Xt 136 TLD EII 220-240	9137006177	1		**
	HF-P XT 236 TLD EII 220-240	9137006178	2	*	
	HF-P 136 TLD EII 220-240	9137001911	1		*
	HF-P 236 TLD 230-240	9137001112	2		**
	HF-Pi 1 14/21/24/39 TL5 EII 220-240	9137006240	1	*	
	HF-R 136 TL-D EII	9137006092	1		
	HF-R 236 TL-D EII	9137006093	2		
	HF-R 136 TL-D 220-240V 50/60Hz	9137001117	1		
	HF-Ri TD 1 14/21/24/39 TL5 E+	9137006983	1		
	HF-S 136 TL-D II	9137130321	1		**
	HF-S 236 TL-D II	9137130324	2		
	HF-S 336 TL-D II	9137130327	3	*	
	HF-P 118/136 TL-D III	9137130315	1		
	HF-S 118/136 TL-D II	9137130321	1		**
	HF-P 136 TLD 220-240	9137001727	1		*
	HF-P 138 TLD 220-240	9137001220	1		
	HF-P 218/236 TL-D III	9137130316	2		*
	HF-S 218/236 TL-D II	9137130324	2		*
	EL-B 236 TLD 220-240	444100085821	2		
	HF-P 236 TLD 220-240	9137001187	2		
	EB-Ci 1-2 36w/1-4 18W	9137130431	2		*
	EB-Ci 1-2 36w/1-4 18W	9137130431	1		*
OSRAM	QT-FIT8 1x36		1		
	QT-FIT8 2x36		2		
	QTP8 1x36		1		*
	QTP8 2x36		2		**
	QTP-OPTIMAL 1x18-40		1		*
	QTP-OPTIMAL 2x18-40		2		*
	QT-FIT 5/8 2x18-39		2	*	
	QTP-DL 1x36-40		1	*	
	QT-FIT 5/8 1x18-39		1		**
	QTP-DL 2x36-40		2		*
HELVAR	EL1x36/40/18S		1		*
	EL1x36HF		1		
	EL1x36ngn		1	*	**
	EL2x36/40s		2	*	
	EL2x36ngn		2		
	EL 1X36sc		1		
	EL 2X36sc		2		

CorePro LEDtube Universal T8 - 1200 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	



	Ballast type	10nc / Ref. no.	Lamps on ballast
TRIDONIC ATCO	PC 1/36 T8 INDUSTRY	86458035	1
	PC 1/36 T8 PRO	22176217	1
	PC 1x36 T8 PRO Ip	22185214	1
	PC2/36 T8 INDUSTRY	86458036	2
	PC2x36 T8 PRO sl	22185217	2
	PC 2x36 T8 TOP sl	22185226	2
	PC 1x36 T8 TOP sl	22185223	1
	PC1/36 T8 PRO sc	89800008	1
	PC 1/36 T8 PRO	22176108	1
	PC 3/36 T8 PRO	22176231	3
	PC 1/36 TCL PRO	87500507	1
	PC 2/36 TCL PRO	87500518	2
VOSSLOH-SCHWABE	ELXc 136.207	188708	1
	ELXc 236.202	188316	2
	ELXc 236.208	188705	2
	ELXe 238.527	188137	2
	ELXe 238.527	188137	1
	ELXd 136.852		1
BAG-HUECO	BCS36.1FX-11/220-240	10077590	1
	BCS36.2FX-11/220-240	10077591	2
	D36.2-23021 E	166132	2
	D 58.1-23021 E	166072	1
	ECS36.2SR-01/220-240	167032	2
Trilux	D36.2-23021 E		2
	D58.1-23021E		1
	DD58.1-23031E		1
TCl	BTL8 136 1		1
Others	EM ballast		1
	Direct Mains (only one single side supply)		1

CorePro LEDtube UN 1200mm HO 18W 8xx T8	CorePro LEDtube UN 1200mm UO 15.5W 8xx T8
Model number / (Short) EOC code: 9290018692C / 871869680166600 9290018693C / 871869680168000 9290018694C / 871869680170300	Model number / (Short) EOC code: 9290036481 / 872016919996500 9290036482 / 872016919998900 9290036483 / 872016920000500
AC (50 Hz) on HF Ballast Compatible	AC (50 Hz) on HF Ballast Compatible
*	*
**	**
*	*
**	**
**	**
**	**
**	**
*	*
*	*
**	**
**	**

CoreProLEDtube Universal

General notes:Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T8 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T8 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtube InstantFit range is designed to work on HF ballasts only. For EM ballasts or direct mains connection, please contact a Signify sales representative for more information on our EM/Mains compatible range. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Ballast types indicated in this list with DIM are conditional released by Signify to offer dimming functionality. Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp. All other Philips LED tubes are not developed for dimming therefore the performance cannot be guaranteed in a dimming application. In case of usage of a non dimmable product in a dimmable application, warranty does not apply.

For EM ballasts or direct mains connection: Please refer to the installation guide.

CorePro LEDtube Universal T8 - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	




	Ballast type	10nc / Ref. no.	Lamps on ballast	CorePro LEDtube UN 1500mm HO 23W 8xx T8	CorePro LEDtube UN 1500mm UO 23W 8xx T8
				Model number / (Short) EOC code: 9290018695C / 8718696 80172700 9290018696C / 8718696 80174100 9290018697C / 8718696 80176500	Model number / (Short) EOC code: 9290036484 / 8720169 20002900 9290036485 / 8720169 20004300 9290036486 / 8720169 20006700
				AC (50 Hz) on HF Ballast Compatible	AC (50 Hz) on HF Ballast Compatible
PHILIPS	EI 158 TL-D 220-240	9137006075	1		
	HF-B 158 TLD 220-240	9137001123	1		
	HF-B 158 TLD EII 220-240	9137001927	1		
	HF-B 258 TLD 220-240	9137001125	2		
	HF-B 258 TL-D EII 220-240	9137001929	2		
	HF-E 158 TL-D	9137130389	1		
	HF-E 1/2 58 TL-D II	9137130409	2		
	HF-E 1/2 58 TL-D II	9137130409	1		
	HF-P 154/155 TL5 HO/PL-L III IDC	9137130282	1		
	HF-P 158 TLD EII 220-240	9137001912	1		
	HF-P 158 TL-D III IDC	9137130318	1		
	HF-P 258 TLD EII 220-240	9137001916	2		
	HF-P 258 TL-D III IDC	9137130319	2		
	HF-P Xt 158 TLD EII 220-240	9137006179	1		
	HF-P Xt 258 TL-D EII 220-240	9137006180	2		
	HF-P 158 TLD 220-240	9137001185	1		
	HF-P 258 TLD 230-240	9137001110	2		
	HF-R 258 TLD 220-240	9137001119	2		
	HF-R 158 TLD EII	9137006 094	1		
	HF-R 258 TLD EII	9137006 095	2		
	HF-R TD 258 TLD EII 220-240	9137006 070	2		
	HF-RiTD 1 28/35/49/54TL5 E+	9137006956	1		
	HF-P 158 TLD 230-240	9137001111	1		
	HF-RiTD 2 28/35/49/54TL5 E+	9137006958	2		
	HF-S 158		1	*	*
	HF-S 158 TL-D II	9137130322	1		
	HF-S 258 TL-D II	9137130325	2		
	HF-S 258 TL-D II HT	9137006899	2		
	HF-S 158 TLD 220-240	9137006319	1		
	EB-P 258 TLD ICC 220-240	9137130210	2		
	HF-P 258 TLD 220-240	9137001206	2		
	HF-S 258 TLD 220-240	9137006452	2		
OSRAM	QT Deluxe HF 1x58 230-240 DIM		1		
	QT Deluxe HF 2x58 230-240 Dim		2		
	QT-FIT8 1x58 - 70		1		
	QT-FIT8 2x58 -70		2		
	QTP8 1x58		1		
	QTP8 2x58		2		
	QTP-OPTIMAL 1x54-58		1		
	QTP-OPTIMAL 2x54 -58		2		
	QT 1X58 DIM		1		
	QT-FIT 5/8 1x54-58		1		
	QT-FIT 5/8 2x54-58		2		
	QT-FIT8 2x54-58		2		
	QTP 1x58/230-240		1		
	QTP 2x58/230-240		2		
HELVAR	EL1x58ngn		1		
	EL1x58s		1		
	EL2x58es		2		
	EL2x58HF		2		
	EL2x58ngn		2		
	EL2x58s		2		

CorePro LEDtube Universal T8 - 1500 mm

Ballast compatibility

Key

	Ballast is compatible.	<i>This document is for information purposes and must be treated as recommendation. Signify attempted to provide best results, results are generated in lab controlled environment and may differ from actual application conditions.</i>
*	Ballast is compatible. Light output may differ >10% compared to specifications.	
**	Ballast is compatible. Light output may differ >20% compared to specifications.	
Dim	Ballast is compatible and conditional released for dimming	
	Ballast is not compatible.	

				CorePro LEDtube UN 1500mm HO 23W 8xx T8	CorePro LEDtube UN 1500mm UO 23W 8xx T8
				Model number / (Short) EOC code: 9290018695C / 8718696 80172700 9290018696C / 8718696 80174100 9290018697C / 8718696 80176500	Model number / (Short) EOC code: 9290036484 / 8720169 20002900 9290036485 / 8720169 20004300 9290036486 / 8720169 20006700
				AC (50 Hz) on HF Ballast Compatible	AC (50 Hz) on HF Ballast Compatible
TRIDONIC ATCO	Ballast type	10nc / Ref. no.	Lamps on ballast	*	*
	PC 1/58 T8 INDUSTRY	86458037	1		
	PC 1/58 T8 PRO	22176094	1		
	PC 1x58 T8 PRO Ip	22185215	1		
	PC 2/58 T8 INDUSTRY	86458038	2		
	PC 2x58 E011		2		
	PC 2x58 E011 IDC	22083174	2		
	PC 2x58 T8 PRO sl	22185218	2		
	PC 1x58 T8 TOP sl	22185224	1		
	PC 2x58 T8 TOP sl	22185227	2		
	PCA 1/58 excel one4all	22085286	1		
	PCA 2x58 EXCEL One4all Ip	28000040	2		
	PCA 1x58 T8 EXCEL One4all Ip	28000036	1		
	PCA 1x58 T8 BASIC Ip	28000043	1		
	PCA 1x58 T8 Eco Ip	28000037	1		
	PCA 2x58 T8 ECO Ip	28000041	2		
	PC 1x58 T8 TEC	87500150	1		
	PC 1/58 T8 PRO	22176007	1		
	PC 2x58 T8 TEC	87500151	2		
VOSSLOH-SCHWABE	ELXc 158.201	188315	1		
	ELXc 158.209	188706	1		
	ELXc 158.218	188870	1		
	ELXc 258.203	188317	2		
	ELXc 258.210	188707	2		
	ELXc 258.219	188871	2		
	ELXe 258.222	188130	2		
	ELXe 258.222	188130	1		
	ELXe 158.524	188024	1		
BAG-HUECO	BCD58.1F-01/220-240/1-10V	10097145	1		
	BCS58.1FX-11/220-240	10077592	1		
	BCS58.2FX-11/220-240	10077593	2		
	BCS58.2SX-01/220-240	10051003	2		
	BCS58.1SR-01/220-240	10051002	1		
	D 58.1-23021 E	166072	1		
	D 58.2-23021 E	166082	2		
	SCS58.2SR-11/220-240	166272	2		
	SCS58.1S-01/230-240	166352	1		
	ECS58.2SR-01/220-240	167172	2		
Trilux	D58.1-23021E	98432	1		
	DD58.1-23031E	98625	1		
	D58.2-23021E		2		
May + Christie	MCU 158		1		
	MCU 258		2		
LUD-WIG	ELXe 158.250	172762	1		
Others	Direct Mains (only one single side supply)				
	Electro Magnetic Ballast				

CoreProLEDtube Universal

General notes: Refer to the product reference number in the header of the columns to use this product-ballast compatibility list.

Please note that Philips LEDtubes InstantFit T8 are only tested with HF ballast on AC operation. The performance of Philips LEDtubes InstantFit T8 on HF ballasts with DC operation is not tested and is therefore not guaranteed. Philips LEDtube InstantFit range is designed to work on HF ballasts only. For EM ballasts or direct mains connection, please contact a Signify sales representative for more information on our EM/Mains compatible range. This document is for information purposes only and must be treated as recommendation. Signify will not accept claims for any damage caused by not implementing the recommendations in this document. Signify does not accept any responsibility, warranty or liability when using Philips LEDtubes with ballasts not mentioned in this list, or when using successor models of the tested ballasts. Although Signify aims to provide the most accurate information and test results from controlled experiments the results may vary in different applications. This document focuses on the behaviour of above mentioned Philips LEDtube. Please also check and follow the instructions of HF ballast manufacturers for installation instructions.

Always check the latest update of the compatibility list on www.philips.com/ledtube.

Dimming a LEDtube: Ballast types indicated in this list with DIM are conditional released by Signify to offer dimming functionality. Please note that the dimming curve of the LEDtube might differ from the curve of a fluorescent lamp. All other Philips LED tubes are not developed for dimming therefore the performance cannot be guaranteed in a dimming application. In case of usage of a non dimmable product in a dimmable application, warranty does not apply.

For EM ballasts or direct mains connection: Please refer to the installation guide.

